



Hydraulic Motor/Pump Series F11/F12

Fixed Displacement

*Catalogue HY17-8249/UK
March 2004*



| Conversion | factors |
|--|----------------------|
| 1 kg | 2.20 lb |
| 1 N..... | 0.225 lbf |
| 1 Nm..... | 0.738 lbf ft |
| 1 bar | 14.5 psi |
| 1 l | 0.264 US gallon |
| 1 cm ³ | 0.061 cu in |
| 1 mm | 0.039 in |
| $\frac{9}{5}^{\circ}\text{C} + 32$ | 1 $^{\circ}\text{F}$ |

| Content | Page |
|---|-------------|
| General information | 4 |
| F11 cross section | 4 |
| F12 cross sections | 5 |
| Specifications | 6 |
| Ordering codes | |
| F11-CETOP | 7 |
| F11-ISO | 8 |
| F11-SAE | 9 |
| F12-ISO | 10 |
| F12-Cartridge | 11 |
| F12-SAE | 12 |
| Preferred versions F11/F12 | 13 |
| Technical information | |
| Bearing life | 14 |
| Bearing life calculation | 14 |
| Required information | 14 |
| Efficiency | 15 |
| Noise level | 15 |
| Selfpriming speed and required inlet pressure | 16 |
| Installation dimensions | |
| F11-5 CETOP | 17 |
| F11-10 CETOP | 18 |
| F11-14 CETOP | 19 |
| F11-19 CETOP | 20 |
| F11-14 ISO | 21 |
| F11-14 SAE | 22 |
| F11-19 SAE | 23 |
| F12-30, -40, -60, -80 and -110 ISO | 24-25 |
| F12-30, -40, -60, -80 and -110 Cartridge | 26-27 |
| F12-30, -40, -60, -80 and -110 SAE 4 bolt flange | 28-29 |
| F12-30, -40, and -60 SAE 2 bolt flange | 30-31 |
| F11-150 CETOP | 32 |
| F11-150 SAE | 33 |
| F11-250 SAE | 34 |
| Technical information | |
| F11 saw motors | 35 |
| F11 fan motors | 35 |
| F12 integrated flushing valve | 36 |
| F12 accessory valve blocks | 36 |
| Type BT brake valve | 37 |
| Type SR pressure relief/make-up valve | 37 |
| Type SV pressure relief valve | 38 |
| Speed sensor | 38 |
| F12 main port suction fittings | 39 |
| Suction fittings | 39 |
| Suction fitting kits | 39 |
| Split-flange kits | 39 |
| Installation information | |
| Direction of rotation | 40 |
| Hydraulic fluids | 40 |
| Operating temperature | 40 |
| Viscosity | 41 |
| Filtration | 41 |
| Case pressure | 41 |
| Before start-up | 42 |
| Case drain connections | 42 |


F11 and F12 are bent axis, fixed displacement heavy-duty motor/pump series. They can be used in numerous applications in both open and closed loop circuits.

- Series F11 is available in the following frame sizes and versions:
 - F11-5, -10, -14, 19 and -150 with CETOP mounting flange and shaft end
 - F11-14 with ISO flange and shaft
 - F11-14, -19, -150 and -250 with SAE flange and shaft
- Series F12 conforms to current ISO and SAE mounting flange and shaft end configurations. A very compact cartridge version is also available.
- Thanks to the unique spherical piston design, F11/F12 motors can be used at unusually high shaft speeds. Operating pressures to 480 bar provides for the high output power capability.
- The 40° angle between shaft and cylinder barrel allows for a very compact, lightweight motor/pump.

- The laminated piston ring offers important advantages such as low internal leakage and thermal shock resistance.
- The pump version has highly engineered valve plates for increased selfpriming speed and low noise, available with left and right hand rotation.
- The F11/F12 motors produce very high torque at start-up as well as at low speeds.
- Our unique timing gear design synchronizes shaft and cylinder barrel, making the F11/F12 very tolerant to high 'G' forces and torsional vibrations.
- Heavy duty roller bearings permit substantial external axial and radial shaft loads.
- The F11's and F12's have a simple and straightforward design with very few moving parts, making them very reliable motors/pumps.
- The unique piston locking, timing gear and bearing set-up as well as the limited number of parts add up to a very robust design with long service life and, above all, proven reliability.


F11 cross section

1. Barrel housing
2. Valve plate
3. Cylinder barrel
4. Guide spacer with O-rings
5. Timing gear
6. Roller bearing
7. Bearing housing
8. Shaft seal
9. Output/input shaft
10. Piston with laminated piston ring

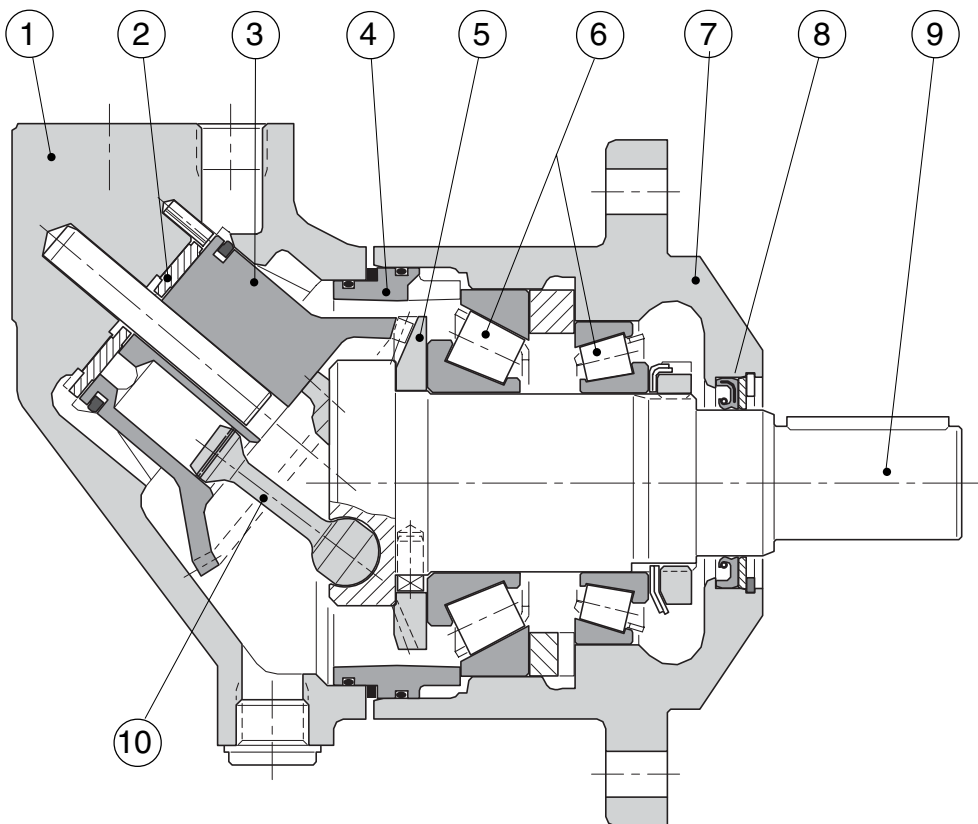


F12 cross sections

F12-30, -40, -60 and -80
 (F12-60 shown)

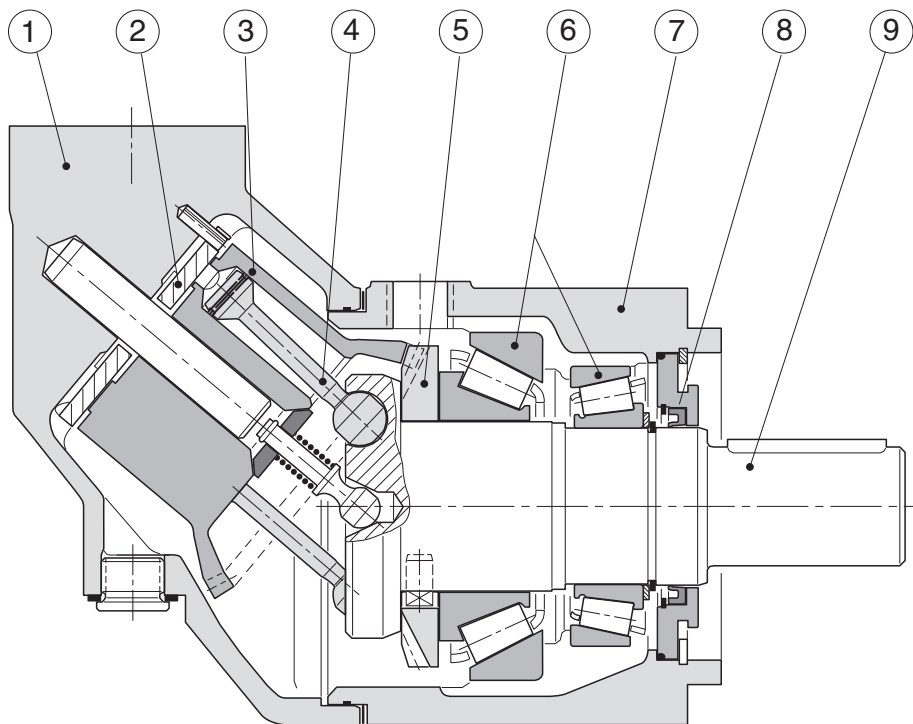

- Legend:
- | | | |
|----------------------------|----------------------------|-------------------------------|
| 1. Barrel housing | 5. Timing gear | 9. Output/input shaft |
| 2. Valve plate | 6. Tapered roller bearings | 10. Port E (F12-110) |
| 3. Cylinder barrel | 7. Bearing housing | 11. Needle bearings (F12-110) |
| 4. Piston with piston ring | 8. Shaft seal | |

F12-110

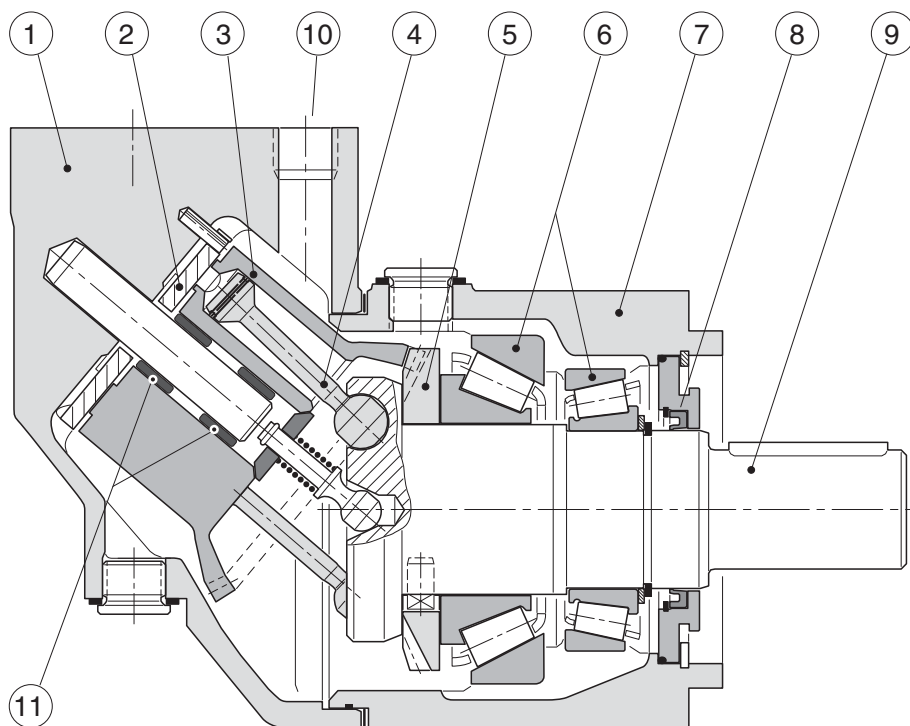

Specifications

| Frame size | F11-5 | -10 | -14 | -19 | F12-30 | -40 | -60 | -80 | -110 | F11-150 | -250 | |
|--|--------|--------|--------|-------|--------|-------|-------|-------|-------|---------|-------|-----|
| Displacement [cm ³ /rev] | 4.9 | 9.8 | 14.3 | 19.0 | 30.0 | 40.0 | 59.8 | 80.4 | 110.1 | 150 | 242 | |
| Operating pressure | | | | | | | | | | | | |
| max intermittent ¹⁾ [bar] | 420 | ————— | | | 420 | 480 | ————— | | | 480 | 420 | 420 |
| max continuous [bar] | 350 | ————— | | | 350 | 420 | ————— | | | 420 | 350 | 350 |
| Motor operating speed [rpm] | | | | | | | | | | | | |
| max intermittent ¹⁾ | 12 000 | 11 000 | 10 000 | 9 000 | 7 100 | 6 400 | 5 600 | 5 200 | 4 700 | 3 000 | 2 700 | |
| max continuous | 10 800 | 9 900 | 9 000 | 8 100 | 5 600 | 5 000 | 4 300 | 4 000 | 3 600 | 2 600 | 2 400 | |
| min continuous | 50 | ————— | | | ————— | | | | | 50 | | |
| Max pump selfpriming speed²⁾ | | | | | | | | | | | | |
| L or R function; max [rpm] | 4 600 | 4 200 | 3 900 | 3 500 | 3 150 | 2 870 | 2 500 | 2 300 | 2 290 | 1 700 | 1 500 | |
| Motor input flow | | | | | | | | | | | | |
| max intermittent ¹⁾ [l/min] | 58 | 108 | 143 | 171 | 213 | 256 | 335 | 418 | 517 | 450 | 650 | |
| max continuous [l/min] | 52 | 97 | 128 | 153 | 168 | 200 | 257 | 322 | 396 | 390 | 580 | |
| Main circuit temp.³⁾, max [°C] | 80 | | | | | | | | | | | |
| min [°C] | -35 | -35 | -30 | -35 | -35 | | | | -35 | | -35 | -35 |
| Mass moment of inertia | | | | | | | | | | | | |
| (x10 ⁻³) [kg m ²] | 0.16 | 0.39 | 0.42 | 1.1 | 1.7 | 2.9 | 5 | 8.4 | 11.2 | 40 | 46 | |
| Weight [kg] | 5 | 7.5 | 8.3 | 11 | 12 | 16.5 | 21 | 26 | 36 | 70 | 77 | |

- 1) Intermittent: max 6 seconds in any one minute.
- 2) Selfpriming speed valid at sea level.
- 3) See also installation information, operating temperature.

Basic formulas for hydraulic motors

Flow (q)

$$q = \frac{D \times n}{1000 \times \eta_v} \text{ [l/min]}$$

D - displacement [cm³/rev]
n - shaft speed [rpm]

Torque (M)

$$M = \frac{D \times \Delta p \times \eta_{hm}}{63} \text{ [Nm]}$$


η_v - volumetric efficiency
 Δp - differential pressure [bar]
(between inlet and outlet)

Power (P)

$$P = \frac{q \times \Delta p \times \eta_t}{600} \text{ [kW]}$$

η_{hm} - mechanical efficiency
 η_t - overall efficiency
($\eta_t = \eta_v \times \eta_{hm}$)

Ordering codes

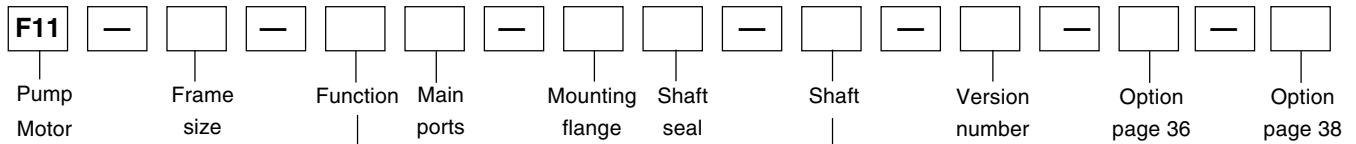

F11-CETOP

| Frame size | |
|------------|-----------------------------------|
| Code | Displacem. (cm ³ /rev) |
| 5 | 4.9 |
| 10 | 9.8 |
| 14 | 14.3 |
| 19 | 19.0 |
| 150 | 150.0 |

| Version number |
|---------------------------------|
| (assigned for special versions) |

| Option |
|--------|
| None |

| Frame size | 5 | 10 | 14 | 19 | 150 |
|---|-----|-----|----|-----|-----|
| Code Function | | | | | |
| M Motor | x | x | - | x | x |
| H Motor, high pressure | x | x | x | x | x |
| Q Motor, silent | (x) | (x) | - | (x) | (x) |
| J Motor, clockwise rot'n ¹⁾ | (x) | (x) | - | (x) | (x) |
| G Motor, counter clockw. ¹⁾ | (x) | (x) | - | (x) | (x) |
| R Pump, clockwise rot'n | x | x | x | x | x |
| L Pump, counter clockw. | x | x | x | x | x |

| Frame size | 5 | 10 | 14 | 19 | 150 |
|---------------------------|-----|-----|-----|-----|-----|
| Code Shaft | | | | | |
| K Metric key | x | x | x | x | x |
| D Spline, DIN 5480 | (x) | (x) | (x) | (x) | (x) |

| Frame size | 5 | 10 | 14 | 19 | 150 |
|--|-----|-----|----|-----|-----|
| Code Main ports | | | | | |
| B BSP threads | x | x | x | x | - |
| R With anti-cavitation valve; clockwise rot'n ²⁾ | - | x | x | x | - |
| L With anti-cavitation valve; counter clockw. ²⁾ | - | x | x | x | - |
| U SAE, UN threads | (x) | (x) | - | (x) | - |
| F SAE 6000 psi flange | - | - | - | - | x |


| Frame size | 5 | 10 | 14 | 19 | 150 |
|--|---|----|----|----|-----|
| Code Shaft seal | | | | | |
| N NBR ³⁾ , low pressure | x | x | - | x | x |
| H NBR ³⁾ , high pressure | x | x | - | x | x |
| E FPM ⁴⁾ , low pressure, high temperature | x | x | x | x | x |
| V FPM ⁴⁾ , high pressure, high temperature | - | x | x | x | - |

| Frame size | 5 | 10 | 14 | 19 | 150 |
|-----------------------------|---|----|----|----|-----|
| Code Mounting flange | | | | | |
| C CETOP flange | x | x | x | x | x |
| W Saw motor flange | - | x | x | x | - |

| Frame size | 5 | 10 | 14 | 19 | 150 |
|------------------------------------|---|----|----|----|-----|
| Code Option | | | | | |
| S With speed sensor | - | - | x | x | - |
| P Prepared for speed sensor | - | - | x | x | - |

- x: Available (x): Optional - : Not available
- 1) Internal drain
- 2) BSP threads
- 3) NBR - Nitrile rubber
- 4) FPM - Fluor rubber

Ordering codes

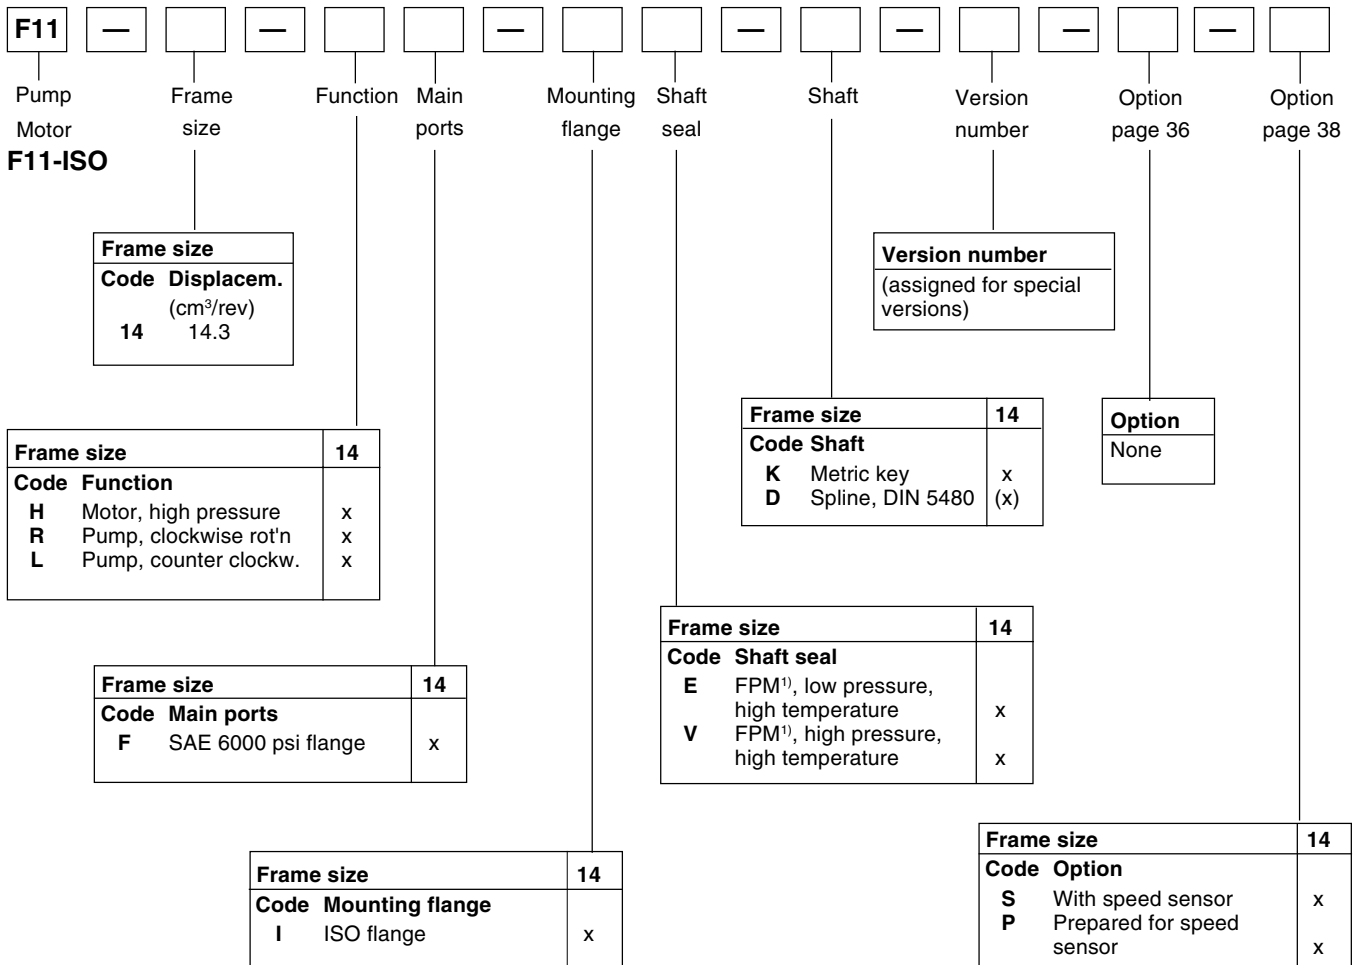

x: Available (x): Optional — : Not available
1) FPM - Fluor rubber

Ordering codes

Series F11/F12

| | | | | | | | | | | | | | | |
|---------------|---------------|----------|---------------|--------------------|---------------|----------|-------------------|-------------------|-------------------|--|----------|--|----------|--|
| F11 | — | | — | | | — | | | — | | — | | — | |
| Pump Motor | Frame size | Function | Main ports | Mounting flange | Shaft seal | Shaft | Version number | Option page 36 | Option page 38 | | | | | |

F11-SAE

| Frame size | | Code | Displacem. (cm ³ /rev) |
|------------|-------|------|--------------------------------------|
| 14 | 14.3 | | |
| 19 | 19.0 | | |
| 150 | 150.0 | | |
| 250 | 242.0 | | |

| Frame size | 14 | 19 | 150 | 250 |
|---|----|-----|-----|-----|
| Code Function | | | | |
| M Motor | - | x | x | - |
| H Motor, high pressure | x | x | x | - |
| Q Motor, silent | - | (x) | (x) | x |
| J Motor, clockwise rot'n ¹⁾ | - | (x) | (x) | - |
| G Motor, counter clockw. ¹⁾ | - | (x) | (x) | - |
| R Pump clockwise rot'n | x | x | x | x |
| L Pump counter clockw. | x | x | x | x |

| Frame size | 14 | 19 | 150 | 250 |
|--|----|-----|-----|-----|
| Code Main ports | | | | |
| U SAE, UN threads | x | x | - | - |
| B BSP threads | - | (x) | - | - |
| F SAE 6000 psi flange ²⁾ | - | - | x | x |

| Frame size | 14 | 19 | 150 | 250 |
|------------------------------------|----|----|-----|-----|
| Code Mounting flange | | | | |
| S SAE flange | x | x | x | x |

| Version number | | (assigned for special versions) | | | |
|----------------|--|---------------------------------|--|--|--|
| Option None | | | | | |


| Frame size | 14 | 19 | 150 | 250 |
|--------------------------|-----|-----|-----|-----|
| Code Shaft | | | | |
| T SAE key | x | x | x | - |
| S SAE spline | (x) | (x) | (x) | (x) |
| K Metric key | - | - | - | x |
| F SAE spline | - | - | - | (x) |

| Frame size | 14 | 19 | 150 | 250 |
|--|----|----|-----|-----|
| Code Shaft seal | | | | |
| N NBR ³⁾ , low pressure | - | x | x | x |
| H NBR ³⁾ , high pressure | - | x | x | x |
| E FPM ⁴⁾ , low pressure, high temperature | x | x | x | x |
| V FPM ⁴⁾ , high pressure, high temperature | x | x | - | - |

| Frame size | 14 | 19 | 150 | 250 |
|------------------------------------|----|----|-----|-----|
| Code Option | | | | |
| S With speed sensor | x | x | - | - |
| P Prepared for speed sensor | x | x | - | - |

- x: Available (x): Optional -: Not available
- 1) Internal drain
 - 2) Metric thread
 - 3) NBR - Nitrile rubber
 - 4) FPM - Fluor rubber

Ordering codes

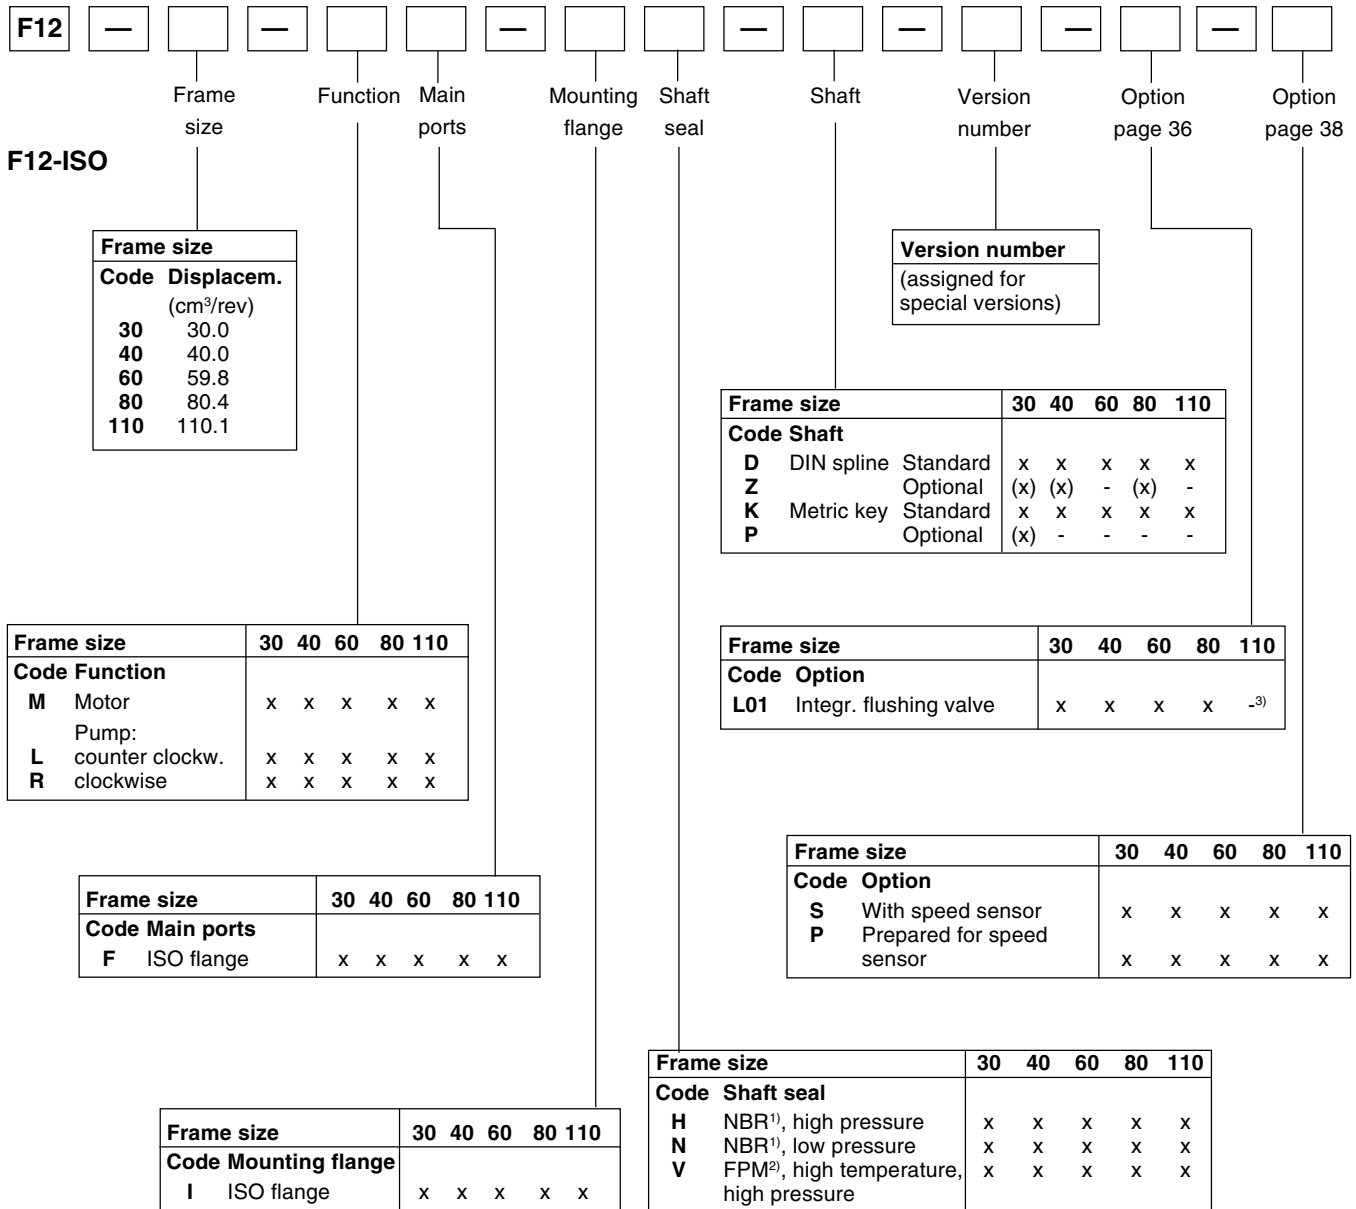

x: Available (x): Optional - : Not available


1) NBR - Nitrile rubber

2) FPM - Fluor rubber

3) F12-110: Accessory valve block (page 36)

Ordering codes

Series F11/F12

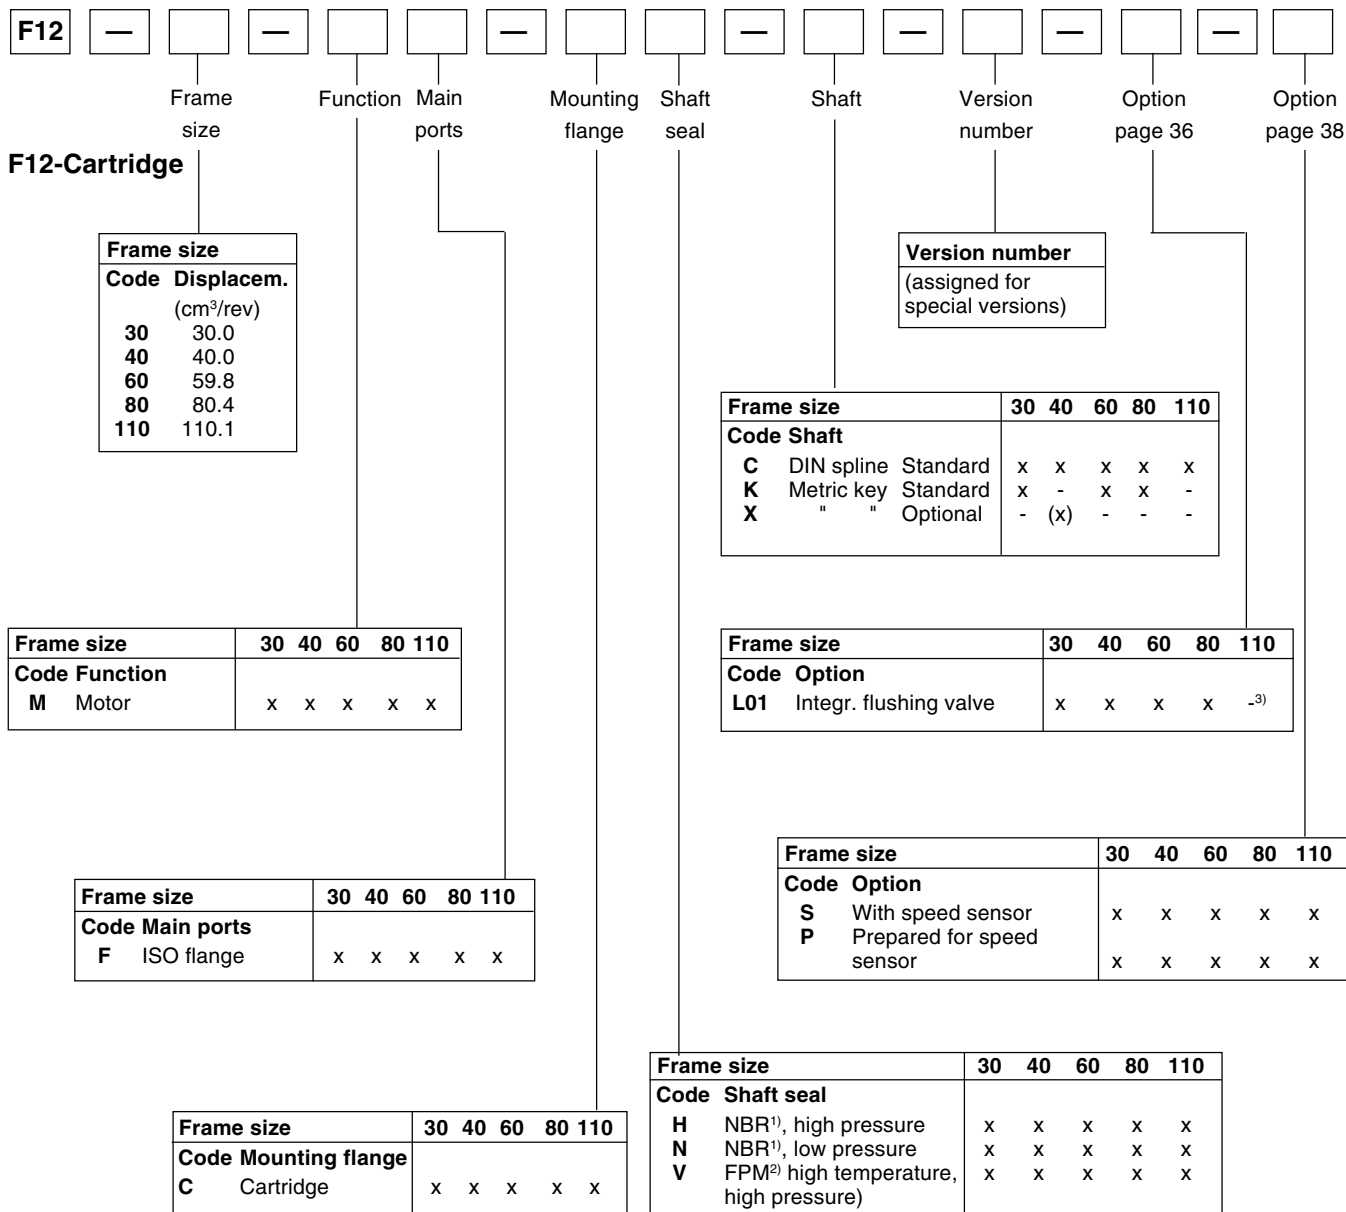

x: Available (x): Optional - : Not available
 1) NBR - Nitrile rubber
 2) FPM - Fluor rubber
 3) F12-110: Accessory valve block (page 36)

Ordering codes

F12 [] [] [] [] [] [] [] [] [] [] [] [] [] [] [] []

Frame size Function Main ports Mounting flange Shaft seal Shaft Version number Option page 36 Option page 38

F12-SAE

| Frame size | | | | | | |
|------------|----------------------|----|----|----|----|-----|
| Code | Displacem. (cm³/rev) | 30 | 40 | 60 | 80 | 110 |
| 30 | 30.0 | | | | | |
| 40 | 40.0 | | | | | |
| 60 | 59.8 | | | | | |
| 80 | 80.4 | | | | | |
| 110 | 110.1 | | | | | |

| Frame size | | 30 | 40 | 60 | 80 | 110 |
|--------------------------|--|----|----|----|----|-----|
| Code Function | | | | | | |
| M Motor | | x | x | x | x | x |
| Pump: | | | | | | |
| L counter clockw. | | x | x | x | x | x |
| R clockwise | | x | x | x | x | x |

| Frame size | | 30 | 40 | 60 | 80 | 110 |
|--------------------------|--|-----|-----|-----|----|-----|
| Code Main ports | | | | | | |
| S SAE flange | | x | x | x | x | x |
| U SAE, UN threads | | (x) | (x) | (x) | - | (x) |

| Frame size | | 30 | 40 | 60 | 80 | 110 |
|--|--|----|----|----|----|-----|
| Code Shaft seal | | | | | | |
| H NBR ¹⁾ , high pressure | | x | x | x | x | x |
| N NBR ¹⁾ , low pressure | | x | x | x | x | x |
| V FPM ²⁾ , high temperature, high pressure | | x | x | x | x | x |

| Frame size | | 30 | 40 | 60 | 80 | 110 |
|------------------------------|--|----|----|----|-----|-----|
| Code Shaft | | | | | | |
| S SAE spline Standard | | x | x | x | x | x |
| U " " Optional | | - | - | - | (x) | - |
| T SAE key Standard | | x | x | x | x | x |

| Frame size | | 30 | 40 | 60 | 80 | 110 |
|-----------------------------------|--|----|----|----|----|-----------------|
| Code Option | | | | | | |
| L01 Integr. flushing valve | | x | x | x | x | - ³⁾ |

| Frame size | | 30 | 40 | 60 | 80 | 110 |
|------------------------------------|--|----|----|----|----|-----|
| Code Option | | | | | | |
| S With speed sensor | | x | x | x | x | x |
| P Prepared for speed sensor | | x | x | x | x | x |

| Frame size | | 30 | 40 | 60 | 80 | 110 |
|--|--|----|----|----|----|-----|
| Code Shaft seal | | | | | | |
| H NBR ¹⁾ , high pressure | | x | x | x | x | x |
| N NBR ¹⁾ , low pressure | | x | x | x | x | x |
| V FPM ²⁾ , high temperature, high pressure | | x | x | x | x | x |

x: Available (x): Optional -: Not available

- 1) NBR - Nitrile rubber
- 2) FPM - Fluor rubber
- 3) F12-110: Accessory valve block (page 36)

Preferred versions F11/F12**F11**

| Ordering Codes | Part number |
|-----------------------|--------------------|
| F11-005-MB-CN-K | 3703665 |
| F11-005-MB-CH-K | 3707249 |
| F11-005-HU-CH-K | 3707308 |
| F11-010-MB-CN-K | 3703603 |
| F11-010-MB-CH-K | 3706030 |
| F11-010-HU-CH-K | 3707310 |
| F11-014-HB-CE-K | 3783201 |
| F11-014-HB-CV-K | 3782830 |
| F11-019-MB-CN-K | 3703516 |
| F11-019-MB-CH-K | 3707893 |
| F11-150-MF-CN-K | 3703468 |
| F11-150-MF-CH-K | 3707008 |
| F11-150-HF-SH-S | 3707325 |
| F11-250-QF-SH-F | 3706440 |
| F11-250-QF-SH-K | 3795858 |

F12

| Ordering Codes | Part number |
|-----------------------|--------------------|
| F12-30-MF-IH-D | 3799843 |
| F12-30-MF-IH-K | 3799844 |
| F12-30-MS-SH-S | 3799851 |
| F12-30-MS-TH-S | 3799616 |
| F12-40-MF-IH-D | 3799525 |
| F12-40-MF-IH-K | 3799526 |
| F12-40-MS-SH-S | 3799532 |
| F12-40-MS-SH-T | 3799533 |
| F12-40-MS-TH-S | 3799617 |
| F12-60-MF-IH-D | 3799988 |
| F12-60-MF-IH-K | 3799989 |
| F12-60-MS-SH-S | 3799998 |
| F12-60-MS-TH-S | 3799618 |
| F12-80-MF-IH-D | 3780767 |
| F12-80-MF-IH-K | 3780772 |
| F12-80-MS-SH-S | 3780783 |
| F12-110-MF-IH-D | 3781530 |
| F12-110-MF-IH-K | 3781534 |
| F12-110-MS-SH-S | 3781542 |


Bearing life

General information

Bearing life can be calculated for that part of the load/ life curve (shown below) that is designated 'Bearing fatigue'. 'Rotating group fatigue and wear' and 'Other' caused by material fatigue, fluid contamination, etc. should also be taken into consideration when estimating the service life of a motor/pump in a specific application.

Bearing life calculations are mainly used when comparing different frame sizes. Bearing life, designated B_{10} (or L_{10}), is dependent of system pressure, operating speed, external shaft loads, fluid viscosity in the case, and fluid contamination level.

The B_{10} value means that 90% of the bearings survive, at a minimum, the number of hours calculated. Statistically, 50% of the bearings will survive at least five times the B_{10} life.

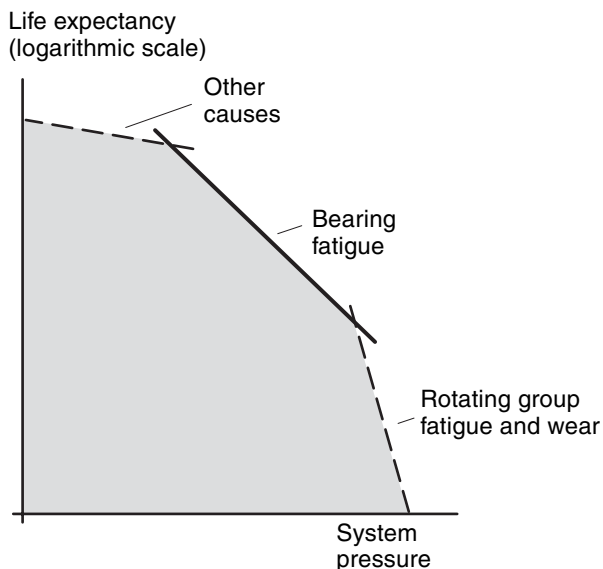

Hydraulic unit life versus system pressure.

Bearing life calculation

An application is usually governed by a certain duty or work cycle where pressure and speed vary with time during the cycle.


In addition, bearing life depends on external shaft forces, fluid viscosity in the case and fluid contamination.

Parker Hannifin (Mobile Controls Division) has a computer program for calculating bearing life and will assist in determining F11 or F12 motor/pump life in a specific application.

Required information

When requesting a bearing life calculation from Parker Hannifin (Mobile Controls Division), the following information (where applicable) should be provided:

- A short presentation of the application
- F11 or F12 size and version
- Duty cycle (pressure and speed versus time at given displacements)
- Low system pressure
- Case fluid viscosity
- Life probability (B_{10} , B_{20} , etc.)
- Operating mode (pump or motor)
- Direction of rotation (L or R)
- External shaft loads
- Fixed or rotating radial load
- Distance between flange and radial load
- Angle of attack (α) as defined below

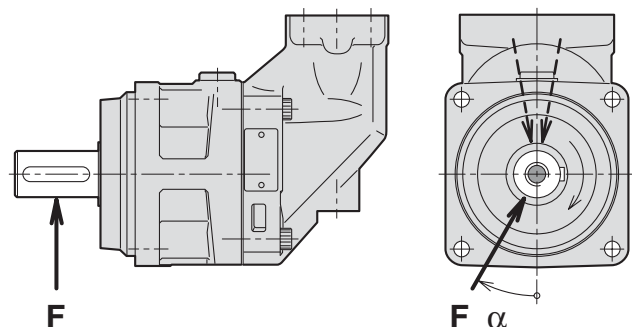

The direction (a) of the radial load is positive in the direction of rotation as shown.



To obtain maximum bearing life, the radial load should, in most cases, be located approximately at 170° (motor; R.H. rot'n) or 190° (pump; R.H rot'n).

Efficiency

Because of its high overall efficiency, driving a motor/pump from series F11/F12 requires less fuel or electric power. Also, it allows the use of a small reservoir and heat exchanger, which in turn reduce cost, weight, and installation size.

The diagrams to the right shows volumetric and mechanical efficiencies of an F12-30.

Contact Parker Hannifin for efficiency information on a particular F11/F12 frame size that is being considered.

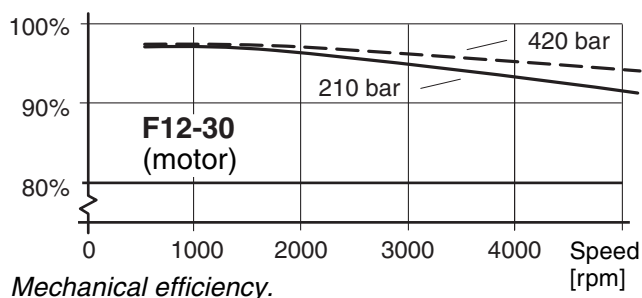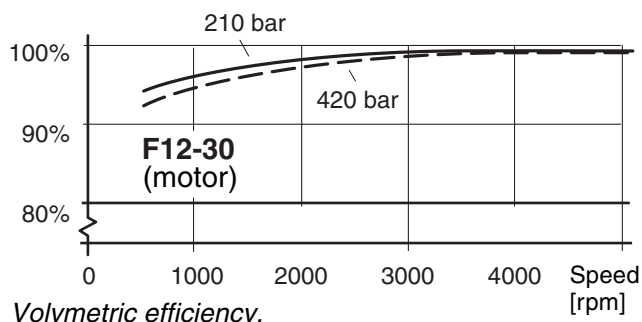

Noise level


Series F11/F12 feature low noise levels from low to high speeds and pressures.

As an example, the diagram to the right shows the noise level of an F12-30.

The noise level is measured in a semi-anechoic room, 1 m behind the unit.

The noise level for a particular motor/pump may vary ± 2 dB(A) compared to what is shown in the diagram.

NOTE: Noise information for F11/F12 frame sizes are available from Parker Hannifin.

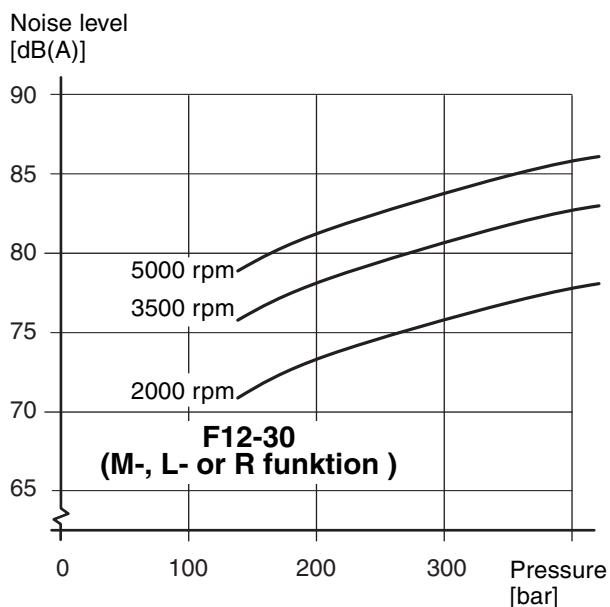

Selfpriming speed and required inlet pressure

Series F11

In pump applications, the F11 with function **L** (counter clockwise rotation) or **R** (clockwise rotation) is normally used. The **L** and **R** (pump) provide the highest selfpriming speeds (see table) as well as the lowest noise level. The **M** (motor) function can also be used as a pump, in either direction, but at a lower selfpriming speed.

Operating above the selfpriming speed (refer to Diagram 1) requires increased inlet pressure.

As an example, at least 1.0 bar is needed when operating the F11-19-M as a pump at 3500 rpm. An F11 with **H** function, used as a motor (e.g. in a hydrostatic transmission), may sometimes operate as a pump at speeds above the selfpriming speed; this requires additional inlet pressure.

Insufficient inlet pressure can cause pump cavitation resulting in greatly increased pump noise and deteriorating performance.

| Function | L or R | M | H |
|----------|--------|------|------|
| F11-5 | 4600 | 3800 | 3200 |
| F11-10 | 4200 | 3100 | 2700 |
| F11-14 | 3900 | - | 3200 |
| F11-19 | 3500 | 2400 | 2100 |
| F11-150 | 1700 | 1300 | 1100 |
| F11-250 | 1500 | 950 | - |

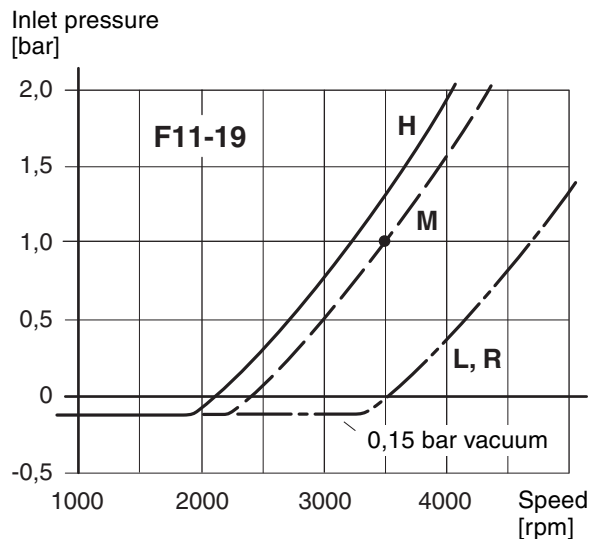



Diagram 1. Min required inlet pressure (F11-19).

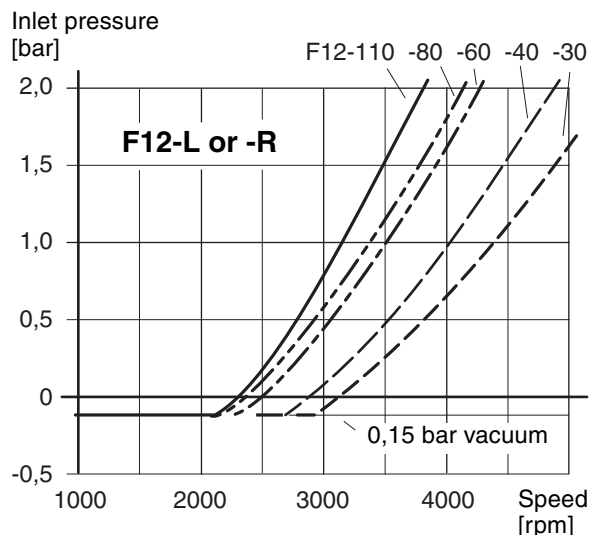


Diagram 2. Min. required pump (F12-L or -R) inlet press.

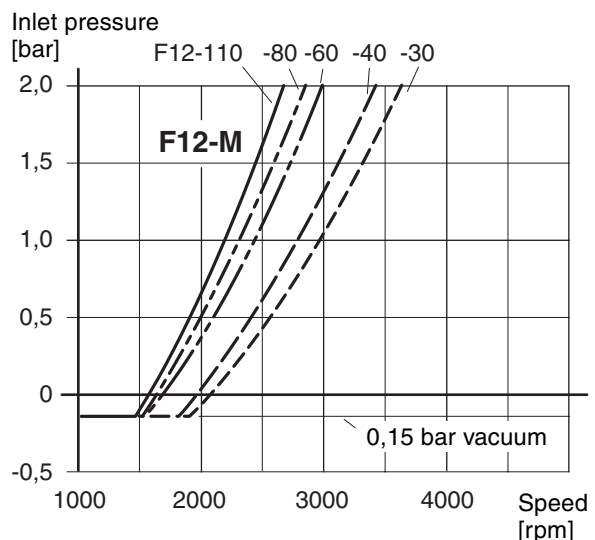


Diagram 3. Min. required motor (F12-M) inlet pressure.

Series F12

When operating the F12 as a pump (with **L** or **R** valve plate) above the selfpriming speed, the inlet must be pressurized. Increased noise and deteriorating performance may otherwise be experienced.


Diagrams 2 and 3 show required pump inlet pressure vs. shaft speed.

The F12 motor (type **M** valve plate) sometimes operates as a pump e.g. when used in a propel transmission and the vehicle is going downhill.

Minimum required inlet pressure versus shaft speed is shown in the diagrams.


NOTE: Diagrams 1, 2 and 3 are valid at sea level.

F11-5
 (CETOP versions)

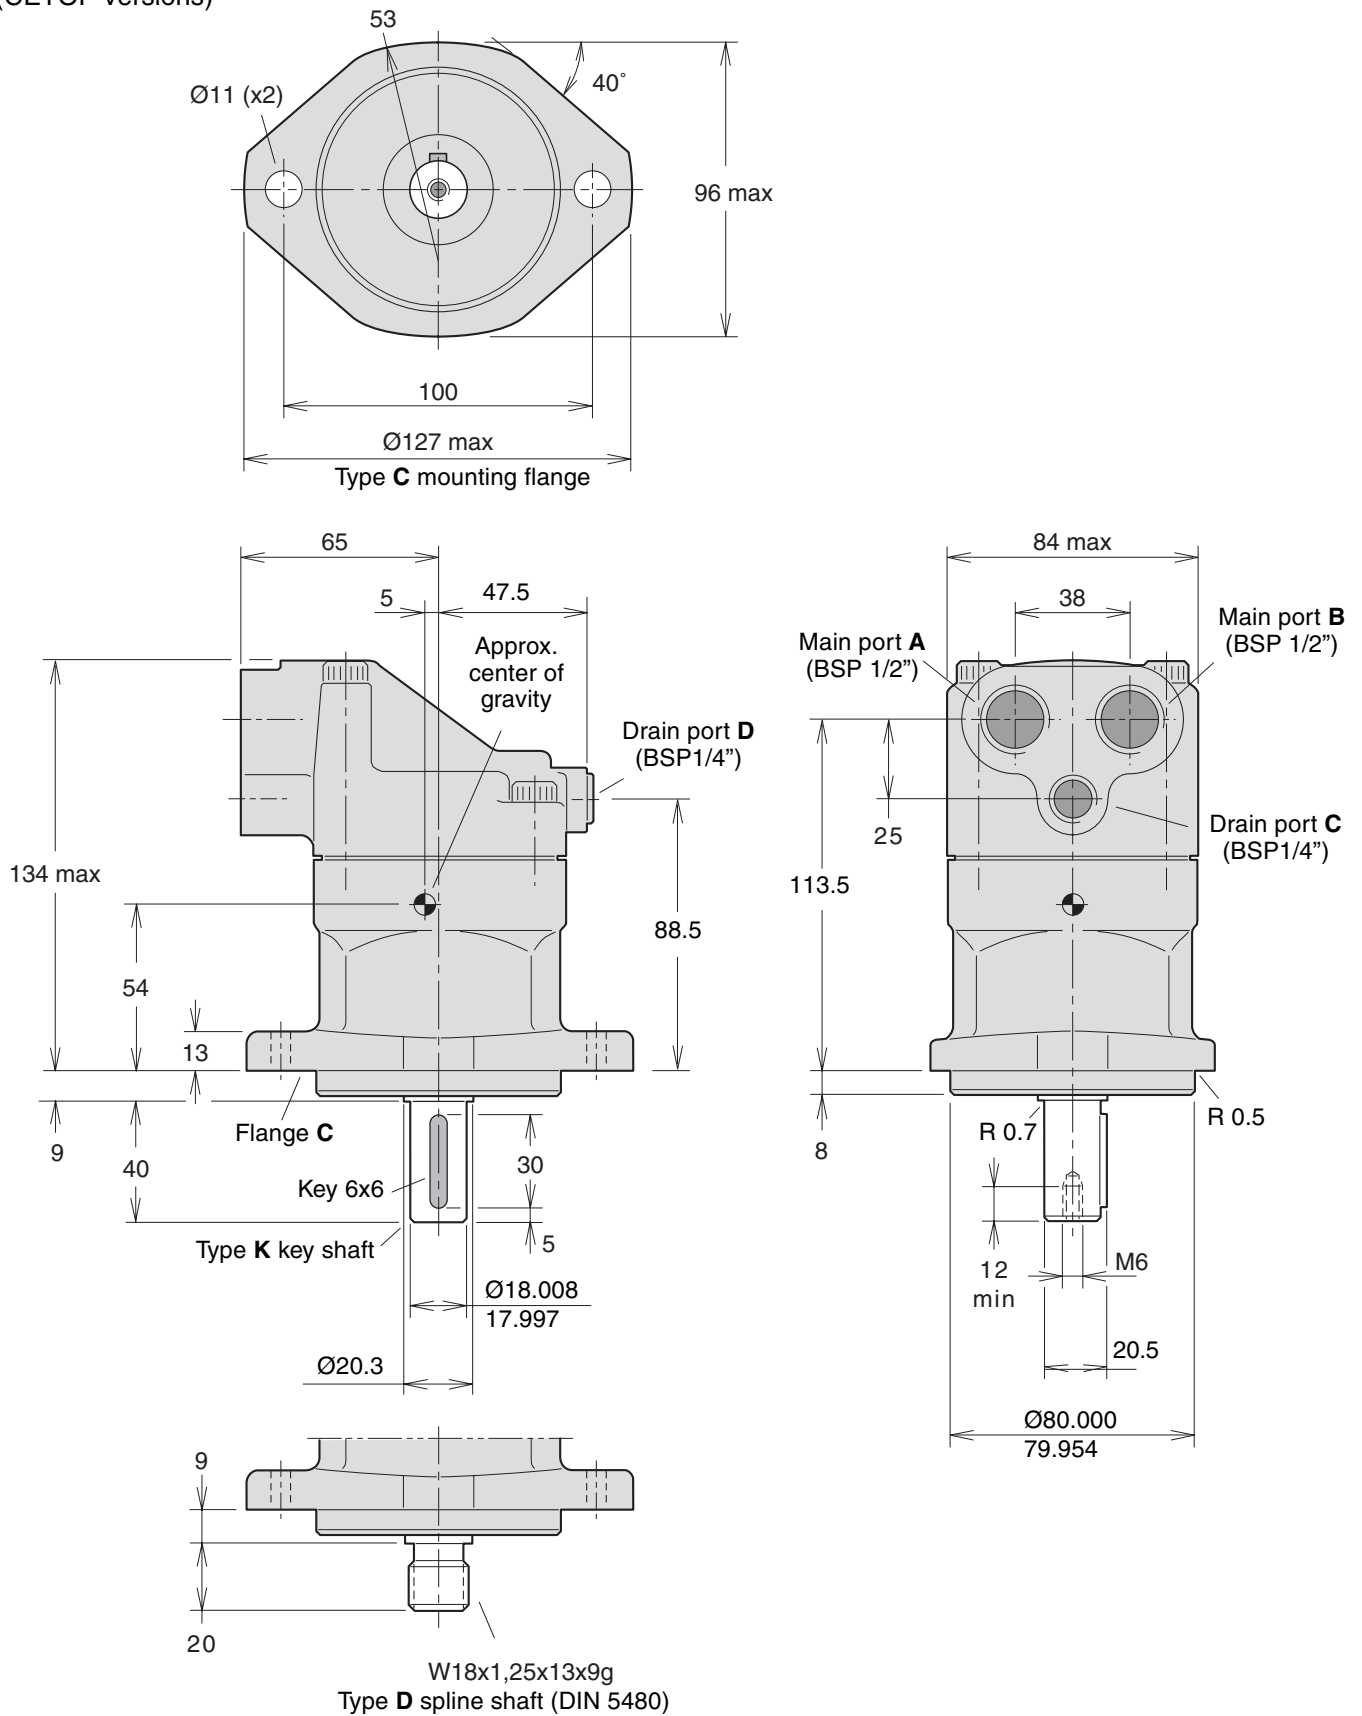


F11-10

(CETOP versions)

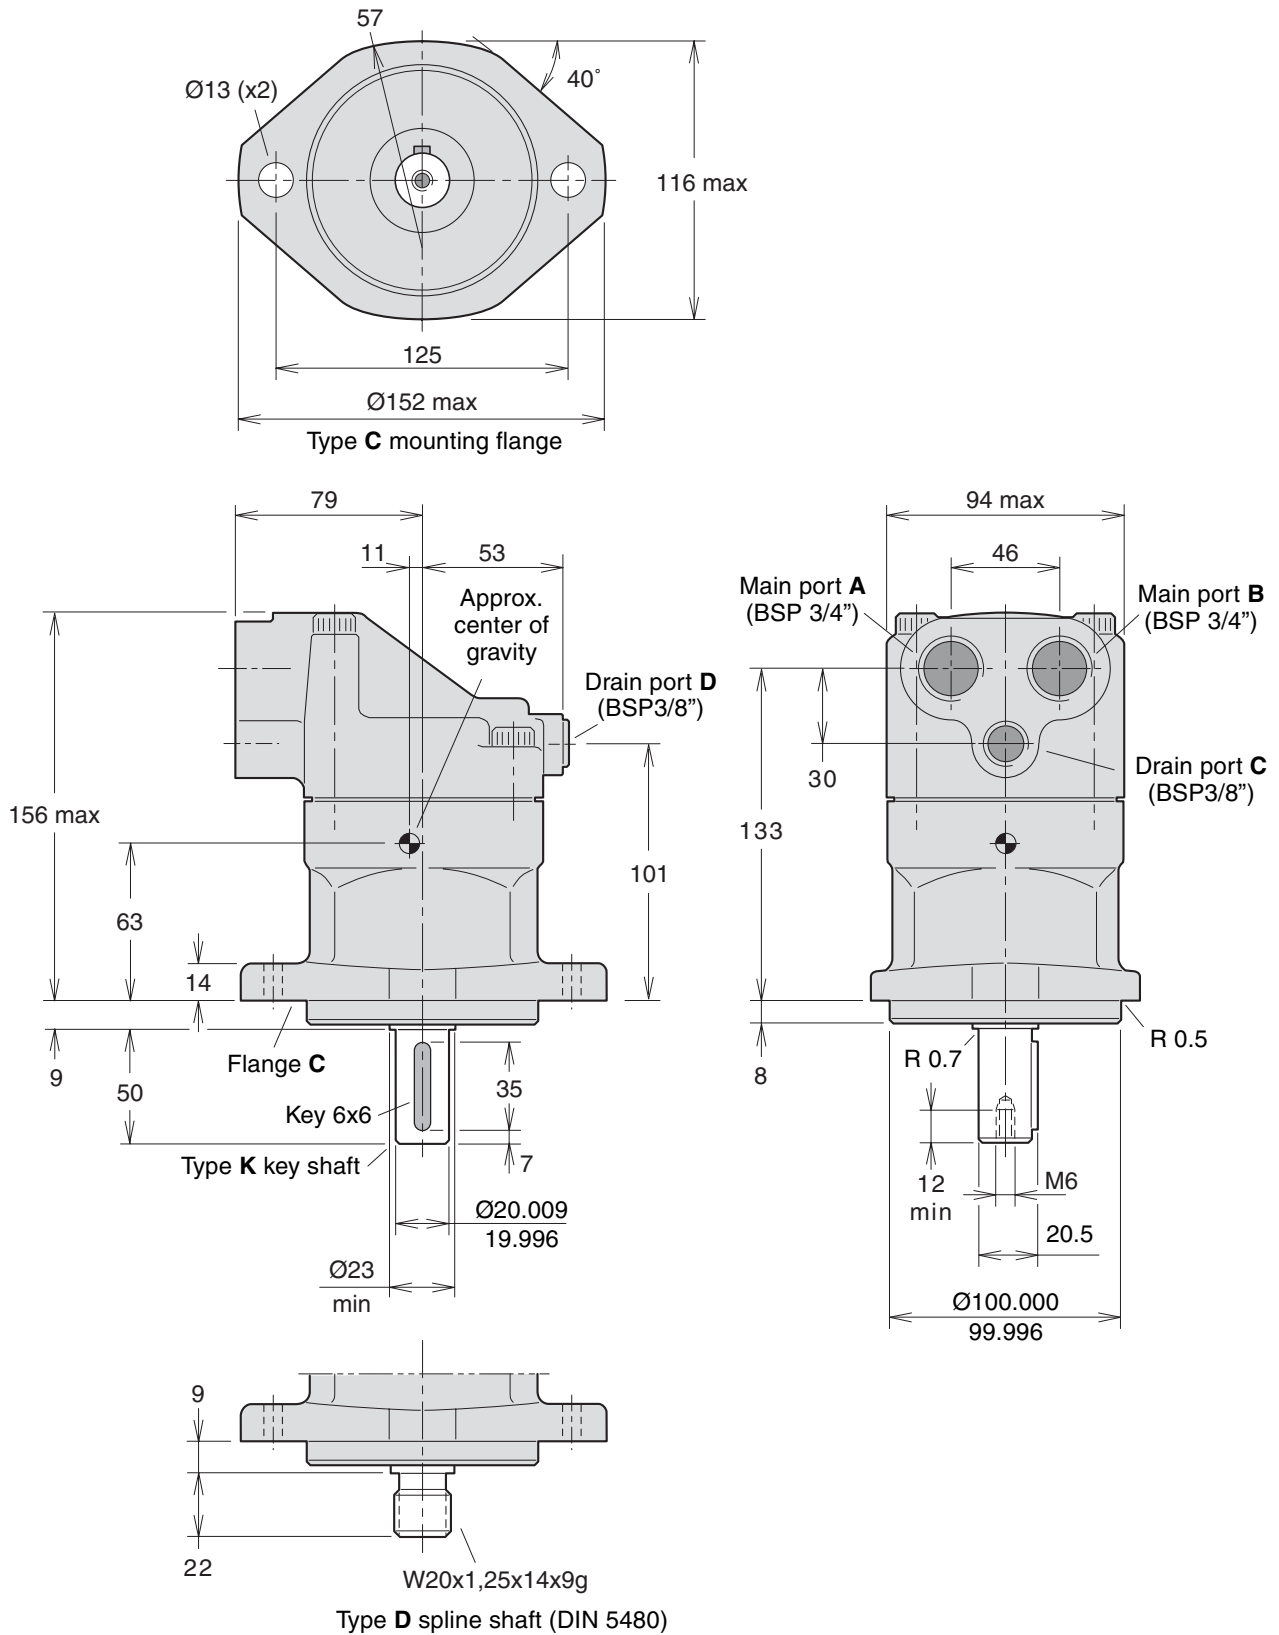


F11-14

(CETOP versions)


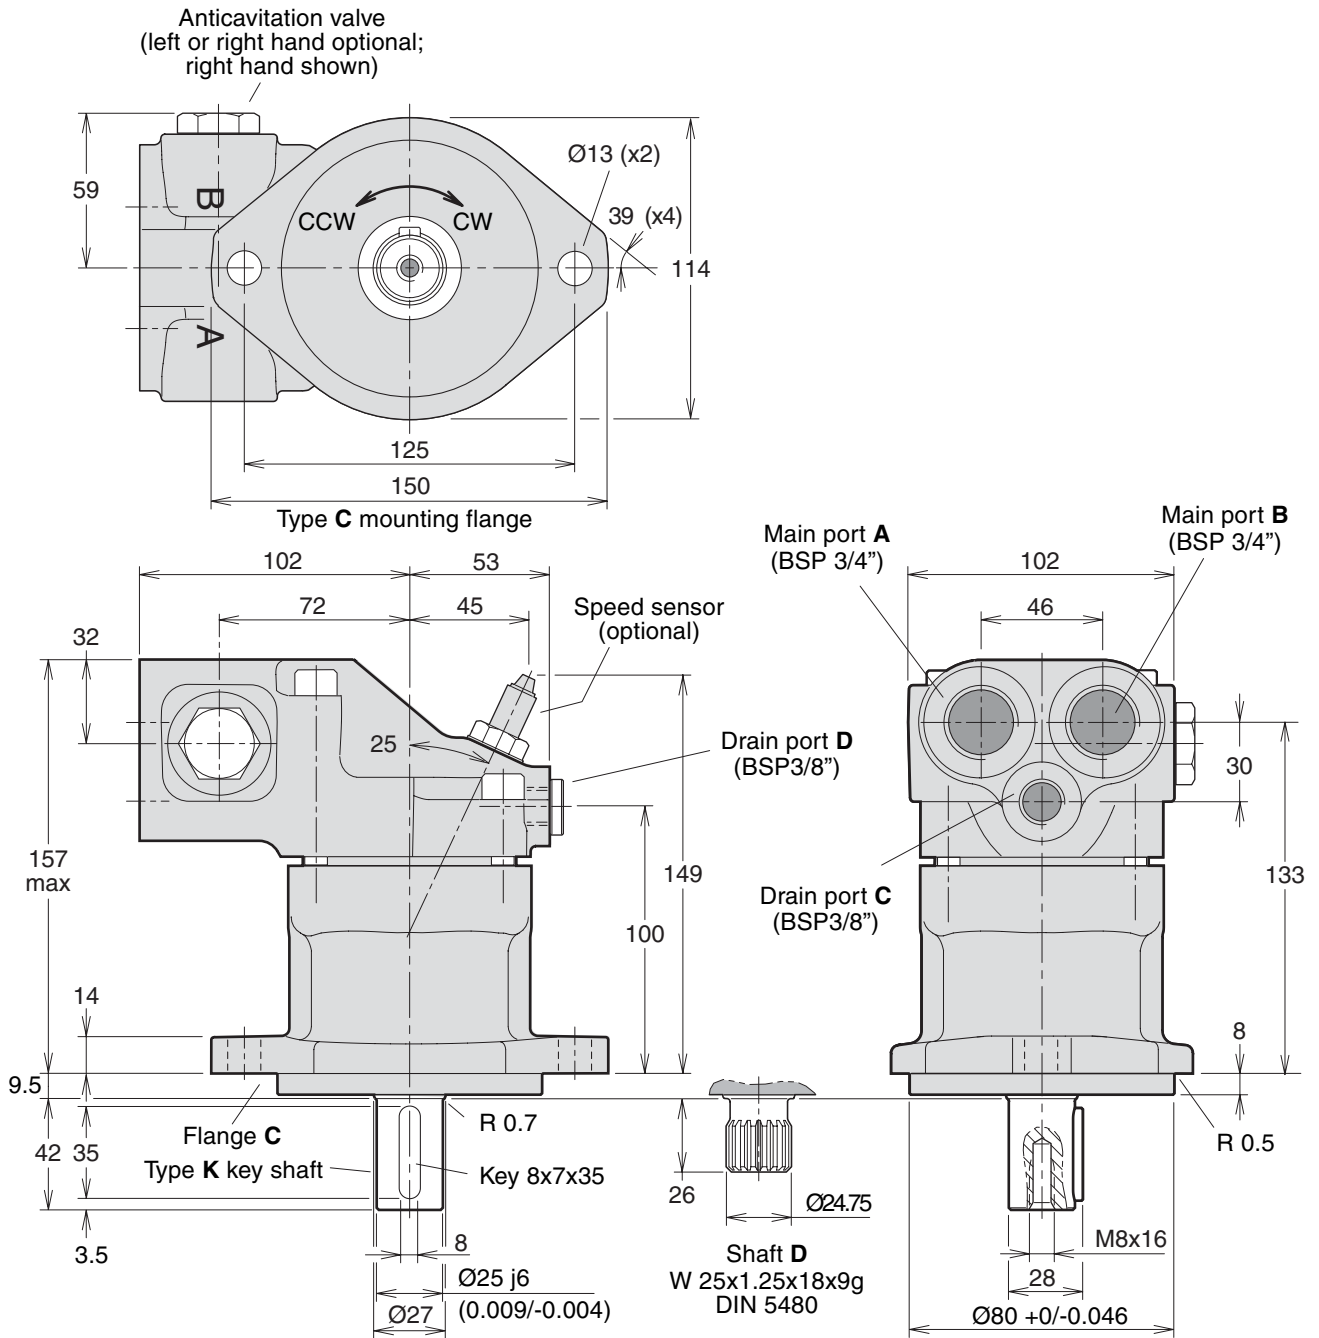


F11-19



(CETOP version)

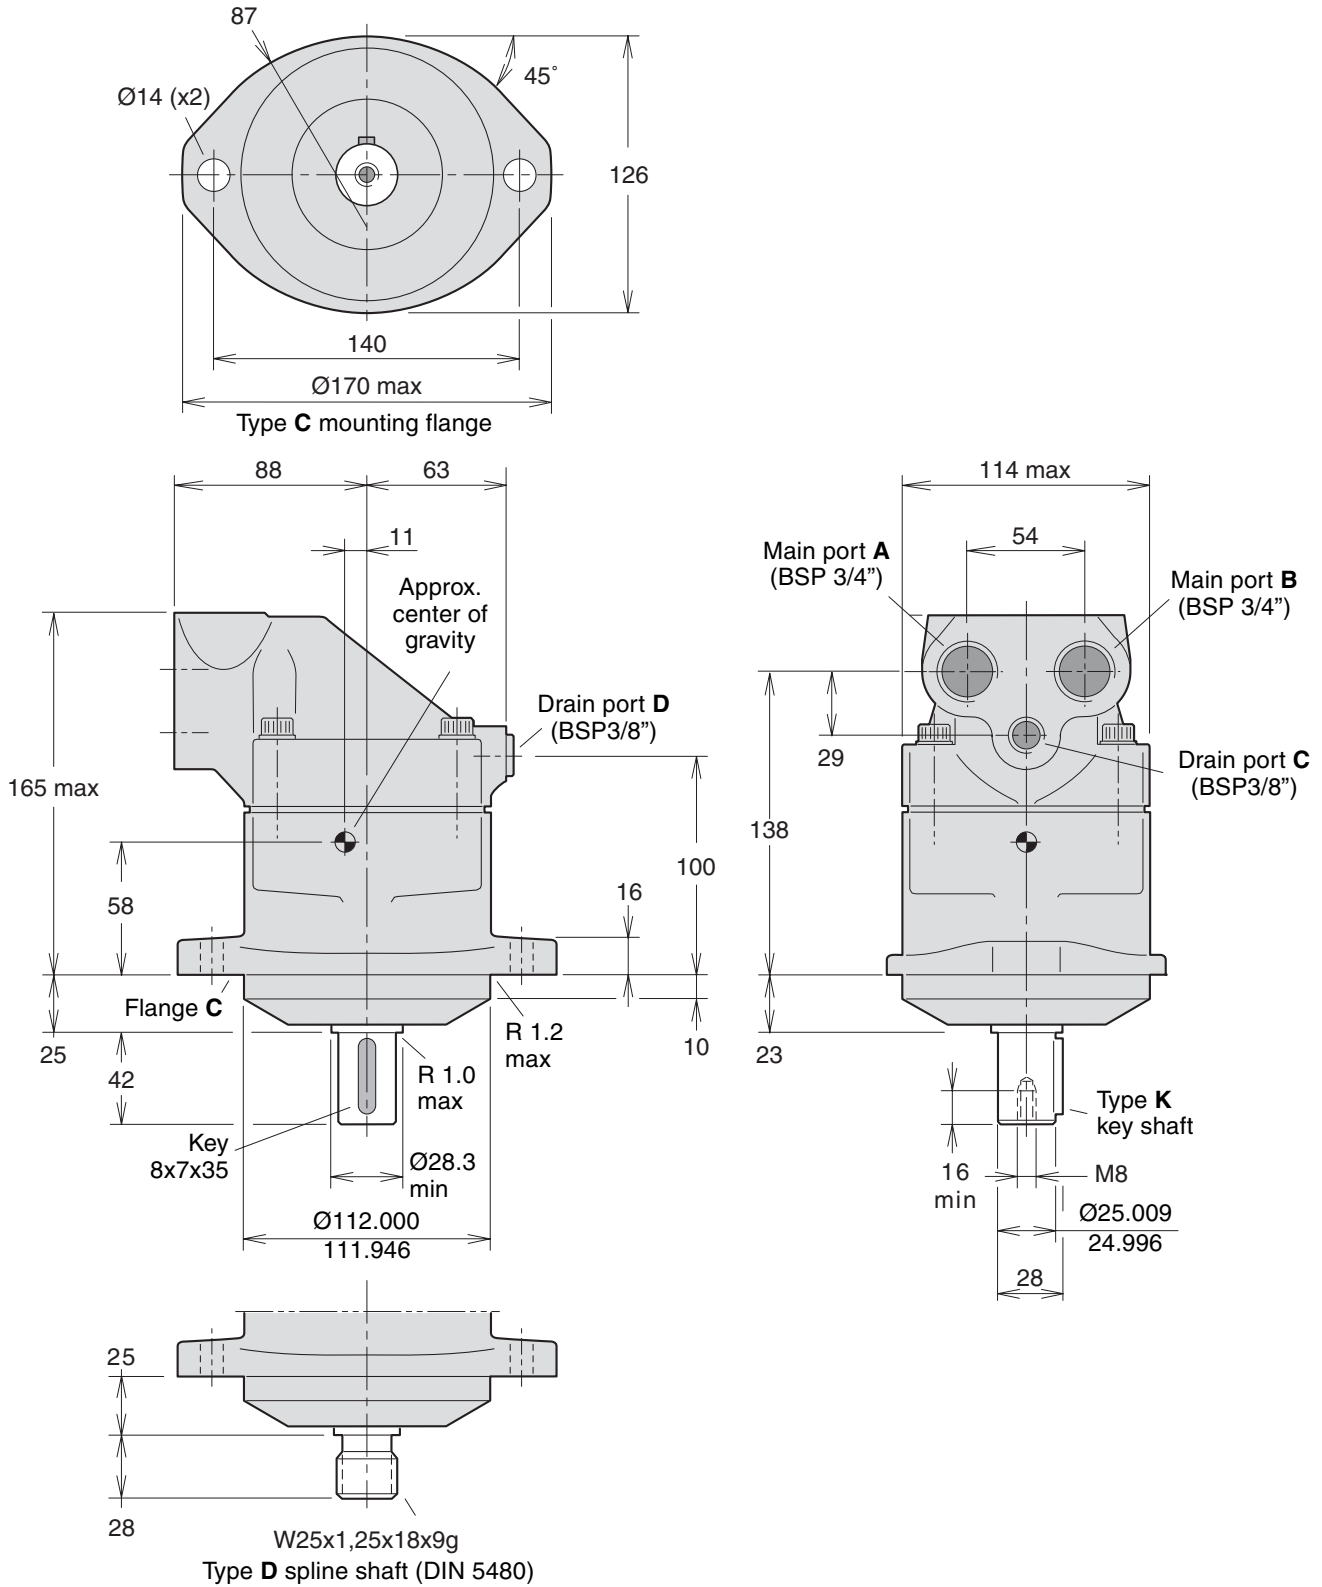




F11-14
 (ISO versions)

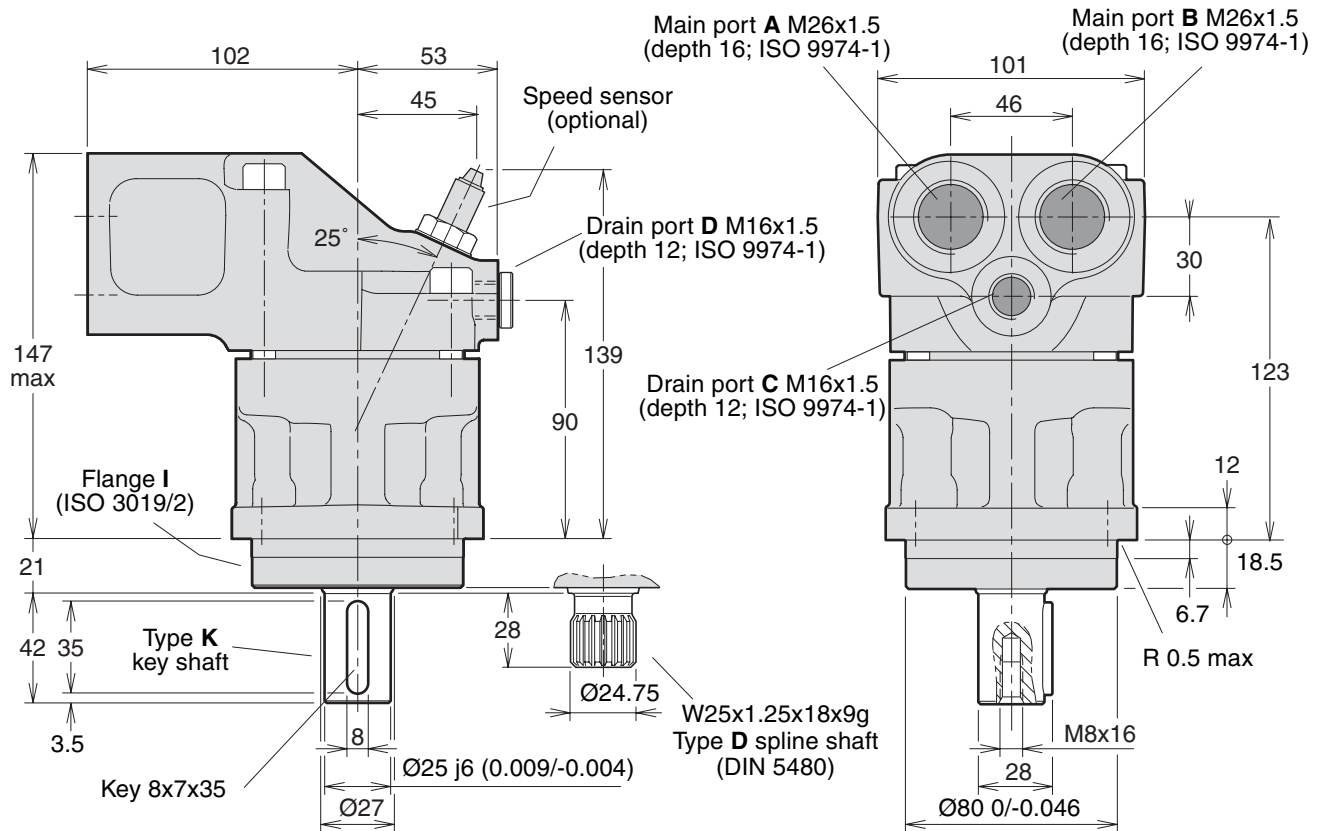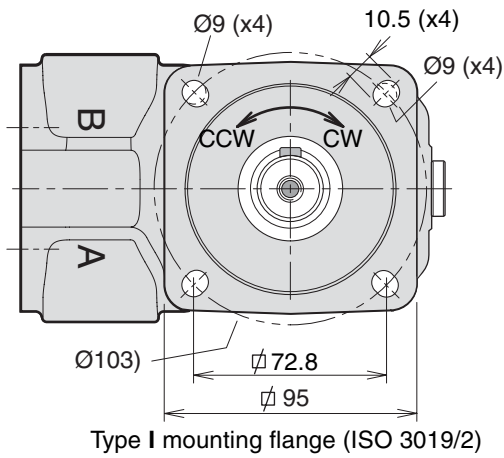

F12-30, -40, -60, -80 and -110
 (ISO versions)

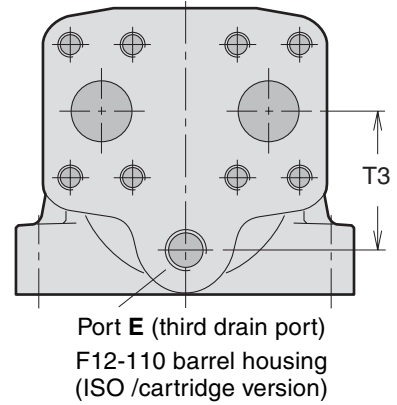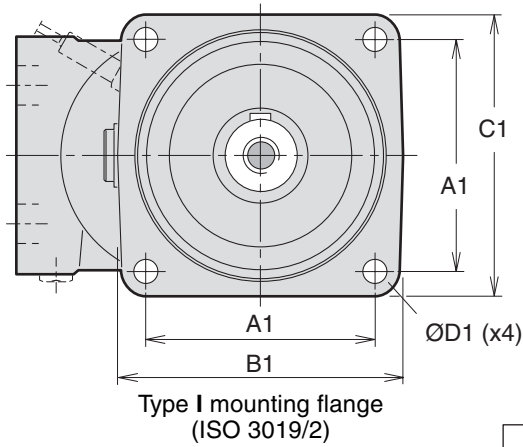

F12-80 shown



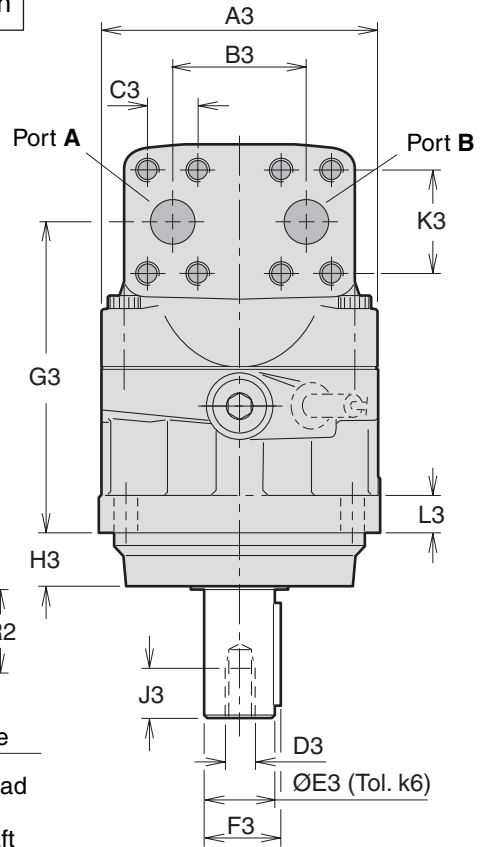

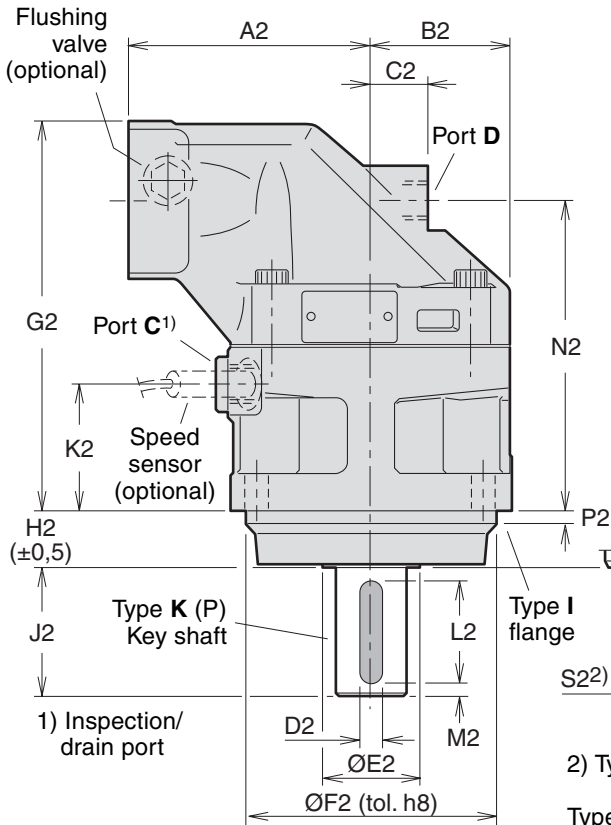


2) Type Z has no thread
 Type D (Z) spline shaft

| Dim. | F12-30 | F12-40 | F12-60 | F12-80 | F12-110 | Ports | F12-30 | F12-40 | F12-60 | F12-80 | F12-110 |
|------------------|---------|---------|---------|---------|---------|---|-------------|-------------------|----------|----------|----------|
| A1 | 88.4 | 113.2 | 113.2 | 127.2 | 141.4 | A, B size | 3/4" | 3/4" | 3/4" | 1" | 1 1/4" |
| B1 | 118 | 146 | 146 | 158 | 180 | Screw thread ¹⁾ | M10 x20 | M10 x20 | M10 x20 | M12 x20 | M14 x26 |
| C1 | 118 | 142 | 144 | 155 | 180 | C thread ²⁾ | M22 x1.5 | M22 x1.5 | M22 x1.5 | M22 x1.5 | M22 x1.5 |
| D1 | 11 | 13.5 | 13.5 | 13.5 | 18 | D thread ²⁾ | M18 x1.5 | M18 x1.5 | M22 x1.5 | M22 x1.5 | M22 x1.5 |
| A2 | 100 | 110 | 125 | 135 | 145 | E thread | - | - | - | - | M22 x1.5 |
| B2 | 59 | 65 | 70 | 78 | 85 | A, B: ISO 6162 1) Metric thread x depth in mm 2) Metric thread x pitch in mm. | | | | | |
| C2 | 25 | 26 | 22 | 32 | 38 | Spline shaft (DIN 5480) | | | | | |
| D2 | 8 | 8 | 10 | 12 | 14 | Type D (standard) | | Type Z (optional) | | | |
| E2 | 33 | 42 | 42 | 52 | 58 | F12-30 | W30x2x14x9g | W25x1.25x18x9g | | | |
| F2 | 100 | 125 | 125 | 140 | 160 | -40 | W32x2x14x9g | W30x2x14x9g | | | |
| G2 | 172 | 173 | 190 | 216 | 231 | -60 | W35x2x16x9g | W32x2x14x9g | | | |
| H2 | 25.5 | 32.5 | 32.5 | 32.5 | 40.5 | -80 | W40x2x18x9g | W35x2x16x9g | | | |
| J2 ¹⁾ | 50 | 60 | 60 | 70 | 82 | -110 | W45x2x21x9g | - | | | |
| J2 ²⁾ | 50 | - | - | - | - | Key shaft | | | | | |
| K2 | 55 | 52 | 54 | 70.5 | 66.5 | Type K (standard) | | Type P (optional) | | | |
| L2 | 40 | 50 | 50 | 56 | 70 | F12-30 | Ø30 | Ø25 | | | |
| M2 | 5 | 5 | 5 | 7 | 6 | -40 | Ø30 | - | | | |
| N2 | 136.5 | 137 | 154 | 172.5 | 179 | -60 | Ø35 | - | | | |
| P2 | 8 | 8 | 8 | 8 | 8 | -80 | Ø40 | - | | | |
| Q2 | 28 | 28 | 33 | 36 | 41 | -110 | Ø45 | - | | | |
| R2 ³⁾ | 35 | 35 | 41 | 45 | 50 | = Max 350 bar operating pressure | | | | | |
| R2 ⁴⁾ | 43 | 35 | 35 | 41 | - | | | | | | |
| S2 ³⁾ | M12 x24 | M12 x24 | M12 x28 | M16 x36 | M16 x36 | | | | | | |
| S2 ⁴⁾ | - | M12 x24 | - | M12 x28 | - | | | | | | |
| A3 | 122 | 134 | 144 | 155 | 170 | | | | | | |
| B3 | 66 | 66 | 66 | 75 | 83 | | | | | | |
| C3 | 23.8 | 23.8 | 23.8 | 27.8 | 31.8 | | | | | | |
| D3 | M12 | M12 | M12 | M16 | M16 | | | | | | |
| E3 | 30 | 30 | 35 | 40 | 45 | | | | | | |
| F3 | 33 | 33 | 38 | 43 | 49 | | | | | | |
| G3 | 136.5 | 137 | 154 | 172.5 | 179 | | | | | | |
| H3 | 23.5 | 30.5 | 30.5 | 30.5 | 38.5 | | | | | | |
| J3 | 24 | 24 | 28 | 36 | 36 | | | | | | |
| K3 | 50.8 | 50.8 | 50.8 | 57.2 | 66.7 | | | | | | |
| L3 | 18 | 20 | 20 | 20 | 22 | | | | | | |
| T3 | - | - | - | - | 68 | | | | | | |

1) Key shaft type K 3) Spline shaft type D
2) Key shaft type P 4) Spline shaft type Z

F12-30, -40, -60, -80 and -110
 (Cartridge versions)

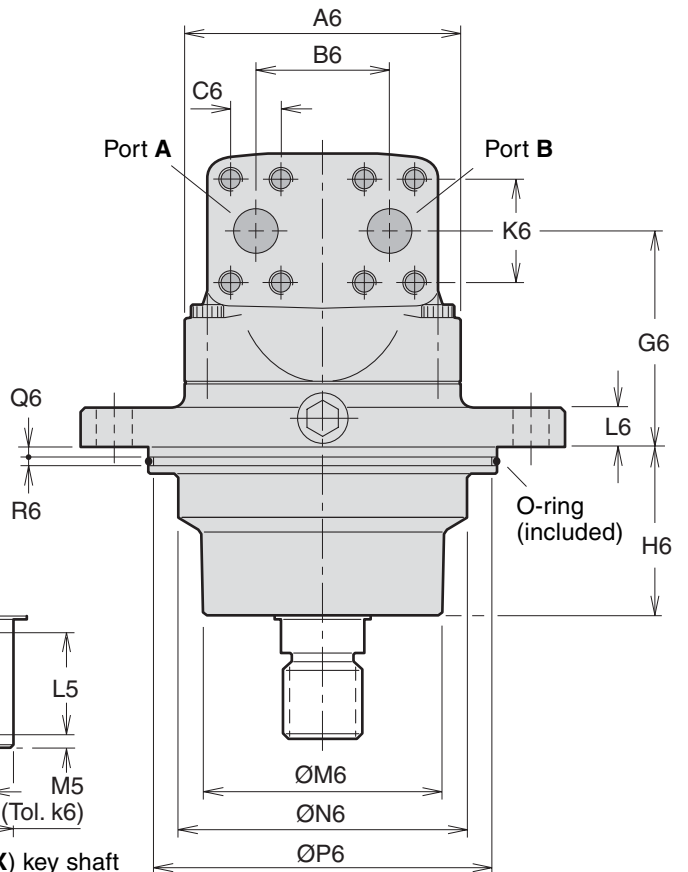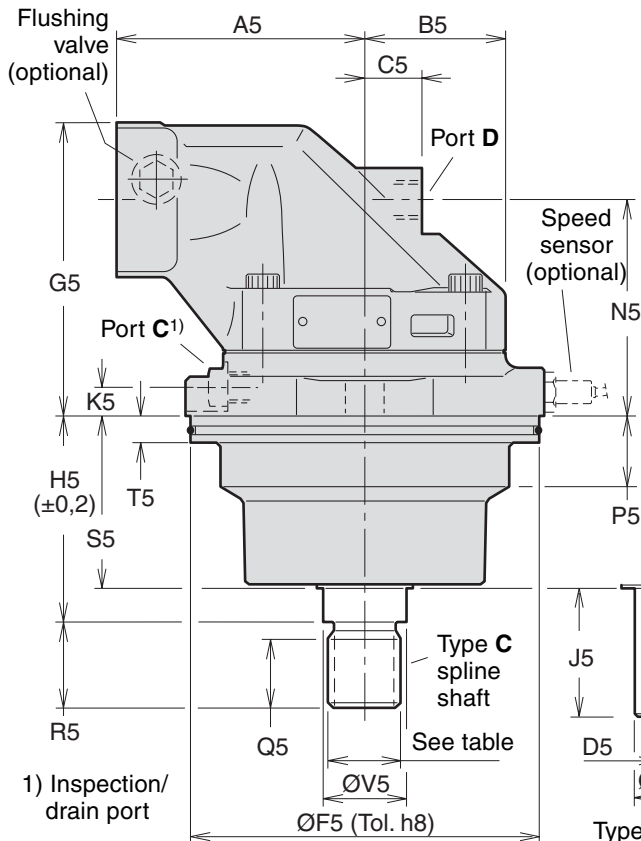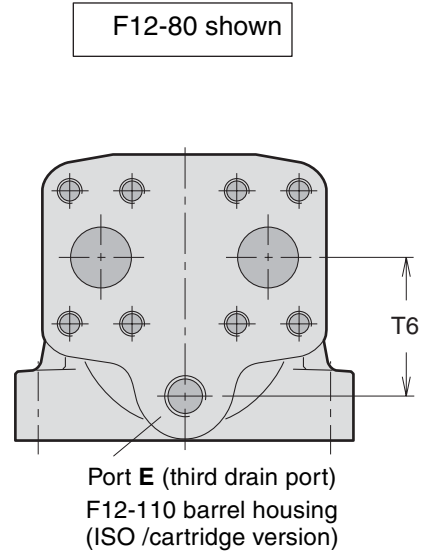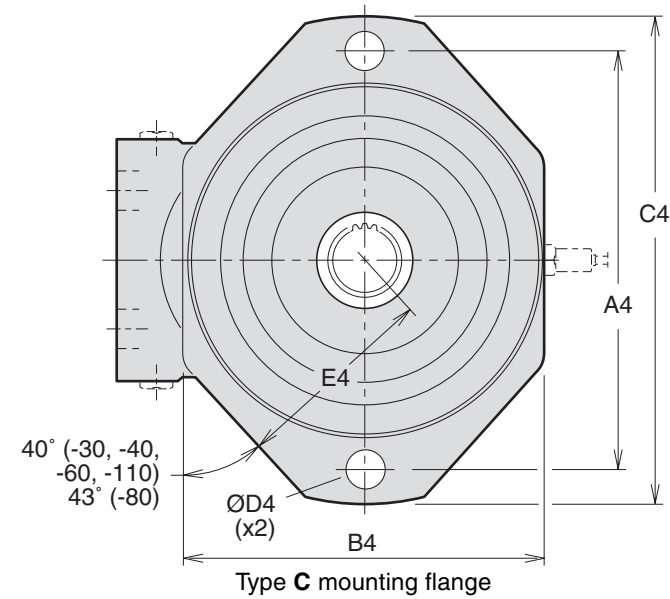

| Dim. | F12-30 | F12-40 | F12-60 | F12-80 | F12-110 | Ports | F12-30 | F12-40 | F12-60 | F12-80 | F12-110 |
|------|--------|-----------------------------------|--------|--------|---------|--------------|----------|----------|----------|----------|----------|
| A4 | 160 | 200 | 200 | 224 | 250 | A, B size | 3/4" | 3/4" | 3/4" | 1" | 1 1/4" |
| B4 | 140 | 164 | 164 | 196 | 206 | Screw thread | M10 x20 | M10 x20 | M10 x20 | M12 x22 | M14 x26 |
| C4 | 188 | 235 | 235 | 260 | 286 | C thread | M14 x1.5 | M14 x1.5 | M14 x1.5 | M14 x1.5 | M14 x1.5 |
| D4 | 14 | 18 | 18 | 22 | 22 | D, E thread | M18 x1.5 | M18 x1.5 | M22 x1.5 | M22 x1.5 | M22 x1.5 |
| E4 | 77 | 95 | 95 | 110 | 116 | | | | | | |
| A5 | 100 | 110 | 125 | 135 | 145 | | | | | | |
| B5 | 59 | 65 | 70 | 77.5 | 85 | | | | | | |
| C5 | 25 | 26 | 22 | 32 | 38 | | | | | | |
| D5 | 8 | 8 ¹⁾ 10 ²⁾ | 10 | 12 | 14 | | | | | | |
| E5 | 30 | 30 ¹⁾ 35 ²⁾ | 35 | 40 | 45 | | | | | | |
| F5 | 135 | 160 | 160 | 190 | 200 | | | | | | |
| G5 | 127 | 133 | 146 | 157 | 175 | | | | | | |
| H5 | 89 | 92.3 | 92.3 | 110.5 | 122.8 | | | | | | |
| J5 | 50 | 60 | 60 | 70 | - | | | | | | |
| K5 | 14 | 16 | 15 | 15 | 15 | | | | | | |
| L5 | 40 | 50 | 50 | 56 | - | | | | | | |
| M5 | 5 | 5 | 5 | 7 | - | | | | | | |
| N5 | 91 | 97 | 110 | 114 | 123 | | | | | | |
| P5 | 22 | 30 | 31 | 40 | 40 | | | | | | |
| Q5 | 28 | 28 | 28 | 37 | 37 | | | | | | |
| R5 | 35 | 35 | 35 | 45 | 45 | | | | | | |
| S5 | 70.5 | 72 | 76 | 91 | 95.7 | | | | | | |
| T5 | 15 | 15 | 15 | 15 | 15 | | | | | | |
| V5 | 32 | 35 | 35 | 45 | 45 | | | | | | |
| A6 | 122 | 134 | 144 | 155 | 170 | | | | | | |
| B6 | 66 | 66 | 66 | 75 | 83 | | | | | | |
| C6 | 23.8 | 23.8 | 23.8 | 27.8 | 31.8 | | | | | | |
| G6 | 91.5 | 97 | 110 | 114 | 123 | | | | | | |
| H6 | 69.5 | 71 | 74 | 89.5 | 93.7 | | | | | | |
| K6 | 50.8 | 50.8 | 50.8 | 57.2 | 66.7 | | | | | | |
| L6 | 16 | 18 | 18 | 20 | 20 | | | | | | |
| M6 | 92 | 115 | 115 | 130 | 140 | | | | | | |
| N6 | 110 | 127 | 135 | 154 | 160 | | | | | | |
| P6 | 128.2 | 153.2 | 153.2 | 183.2 | 193.2 | | | | | | |
| Q6 | 5 | 5 | 5 | 5 | 5 | | | | | | |
| R6 | 5 | 5 | 5 | 5 | 5 | | | | | | |
| T6 | - | - | - | - | 68 | | | | | | |

A, B: ISO 6162

Spline shaft (DIN 5480)

Type C (standard)

| | |
|--------|-------------|
| F12-30 | W30x2x14x9g |
| -40 | W30x2x14x9g |
| -60 | W30x2x14x9g |
| -80 | W40x2x18x9g |
| -110 | W40x2x18x9g |

Key shaft

Type K (std) Type X (opt.)

| | | |
|--------|-----|-----|
| F12-30 | Ø30 | - |
| -40 | - | Ø35 |
| -60 | Ø35 | - |
| -80 | Ø40 | - |

O-ring dimensions


| | |
|--------|-------|
| F12-30 | 127x4 |
| -40 | 150x4 |
| -60 | 150x4 |
| -80 | 180x4 |
| -110 | 190x4 |

1) Key shaft type K


2) Key shaft type X (opt.).

F12-30, -40, -60, -80 and -110


(SAE versions with 4 bolt flange)

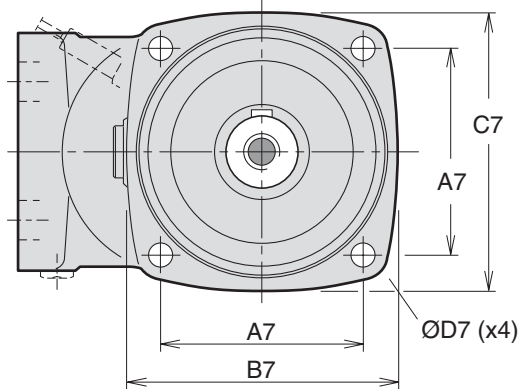


Type S (SAE 4 bolt) mounting flange

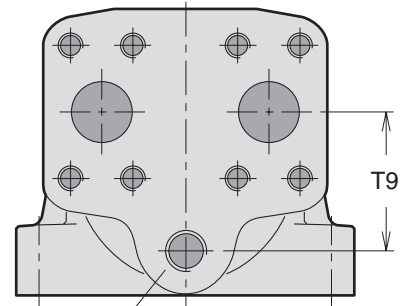

Port E (third drain port)
F12-110 barrel housing (SAE version)

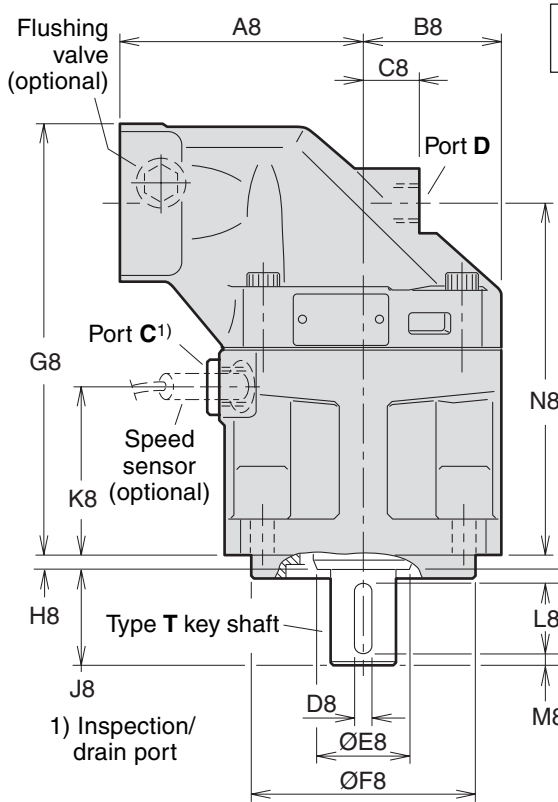

Shown: F12-80 with 4 bolt flange

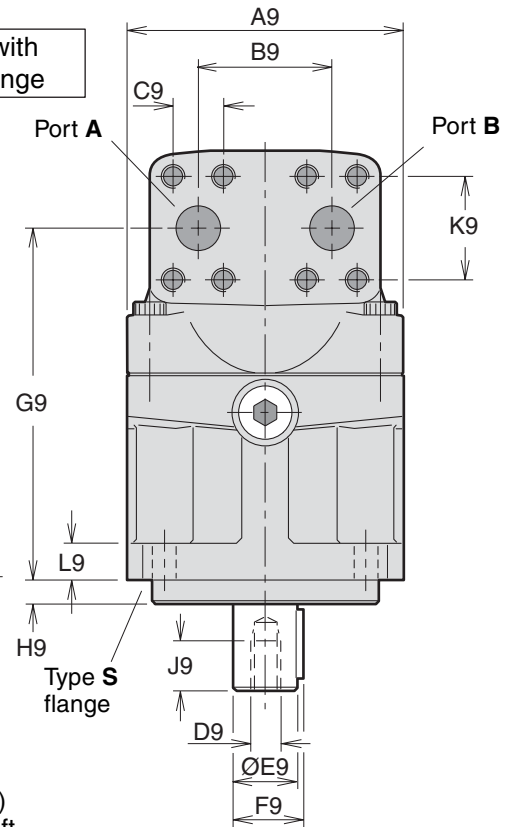

| Dim. | F12-30 | F12-40 | F12-60 | F12-80 | F12-110 |
|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| A7 | 89.8 | 114.5 | 114.5 | 114.5 | 161.6 |
| B7 | 118 | 148 | 148 | 155 | 204 |
| C7 | 118 | 144 | 144 | 155 | 200 |
| D7 | 14 | 14 | 14 | 14 | 21 |
| A8 | 100 | 110 | 125 | 135 | 145 |
| B8 | 59 | 65 | 70 | 77.5 | 85 |
| C8 | 25 | 26 | 22 | 32 | 38 |
| D8 | 6.35 | 7.94 | 7.94 | 9.53 | 11.1 |
| E8 | 33 | 42 | 42 | 52 | 57.5 |
| F8 | 101.60/ 101.55 | 127.00/ 126.94 | 127.00/ 126.94 | 127.00/ 126.94 | 152.40/ 152.34 |
| G8 | 189.5 | 197 | 214 | 240 | 264 |
| H8 | 8 | 8 | 8 | 8 | 8 |
| J8 | 38 | 48 | 48 | 54 | 67 |
| K8 | 72 | 76 | 79 | 95 | 99 |
| L8 | 31.8 | 38.1 | 38.1 | 44.5 | 54.1 |
| M8 | 2.5 | 4 | 4 | 4 | 7.5 |
| N8 | 153.5 | 161 | 178.3 | 197.1 | 212 |
| Q8 ¹⁾ | 23 | 23 | 23 | 25 | 34 |
| Q8 ²⁾ | - | - | - | 23 | - |
| R8 ¹⁾ | 33 | 48 | 48 | 54 | 66.7 |
| R8 ²⁾ | - | - | - | 48 | - |
| A9 | 122 | 134 | 144 | 155 | 170 |
| B9 | 66 | 66 | 66 | 75 | 83 |
| C9 | 23.8 | 23.8 | 23.8 | 27.8 | 31.8 |
| D9* | 5/16"-24 | 3/8"-24 | 3/8"-24 | 1/2"-20 | 5/8"-18 |
| E9 | 25.40/ 25.35 | 31.75/ 31.70 | 31.75/ 31.70 | 38.10/ 38.05 | 44.45/ 44.40 |
| F9 | 28.2 | 35.3 | 35.3 | 42.3 | 49.4 |
| G9 | 153.8 | 161 | 178.3 | 197.1 | 212 |
| H9 | 9.7 | 12.7 | 12.7 | 12.7 | 12.7 |
| J9 | 16 | 19 | 19 | 26 | 32 |
| K9 | 50.8 | 50.8 | 50.8 | 57.2 | 66.7 |
| L9 | 18 | 20 | 20 | 20 | 22 |
| T9 | - | - | - | - | 68 |

* UNF-2B thread

1) Spline shaft type **S**

2) " " " **U**

Main ports A and B, type U (optional)

| | |
|---------|----------------|
| F12-110 | 1 5/8" - 12 UN |
|---------|----------------|

O-ring ports according to SAE J514d

| Ports | F12-30 | F12-40 | F12-60 | F12-80 | F12-110 |
|----------------------------|-------------|-------------|-------------|--------------|-------------|
| A, B size | 3/4" | 3/4" | 3/4" | 1" | 1 1/4" |
| Screw thread ³⁾ | 3/8"-16 x22 | 3/8"-16 x20 | 3/8"-16 x22 | 7/16"-14 x27 | 1/2"-13 x25 |
| C thread | 7/8"-14 | 7/8"-14 | 7/8"-14 | 7/8"-14 | 1 1/16"-12 |
| D thread | 3/4"-16 | 3/4"-16 | 7/8"-14 | 7/8"-14 | 1 1/16"-12 |
| E thread | - | - | - | - | 1 1/16"-12 |

A, B: ISO 6162

C, D, E: O-ring boss (SAE J514)

3) UN thread x depth in mm.

Mounting flange (SAE J744)

S (standard) **X (optional)**

| F12-30 | S (standard) | X (optional) |
|--------|-----------------|-----------------|
| -40 | SAE 'B', 4 bolt | - |
| -60 | SAE 'C', " | - |
| -80 | SAE 'C', " | SAE 'D', 4 bolt |
| -110 | SAE 'D', " | - |

Spline shaft (SAE J498b, class 1, flat root, side fit)

S (standard) **U (opt.)** **X (optional)**

| F12-30 | S (standard) | U (opt.) | X (optional) |
|--------|-------------------------|-----------------------|----------------------|
| -40 | SAE 'B' 13T, 16/32 DP | - | - |
| -60 | SAE 'C' 14T, 12/24 DP | - | - |
| -80 | SAE 'C-C' 17T, 12/24 DP | SAE 'C' 14T, 12/24 DP | SAE 'D' 13T, 8/16 DP |
| -110 | SAE 'D' 13T, 8/16 DP | - | - |

= Max 350 bar operating pressure.


Key shaft (SAE J744)

T (standard) **X (optional)**




| F12-30 | T (standard) | X (optional) |
|--------|-----------------------------|----------------------------|
| -40 | SAE 'B-B' (Ø25.4 mm/1") | - |
| -60 | SAE 'C' (Ø31.75 mm/1 1/4") | - |
| -80 | SAE 'C-C' (Ø38.1 mm/1 1/2") | SAE 'D' (Ø44.45 mm/1 3/4") |
| -110 | SAE 'D' (Ø44.45 mm/1 3/4") | - |

F12-30, -40, and -60

(SAE versions with 2 bolt flange)

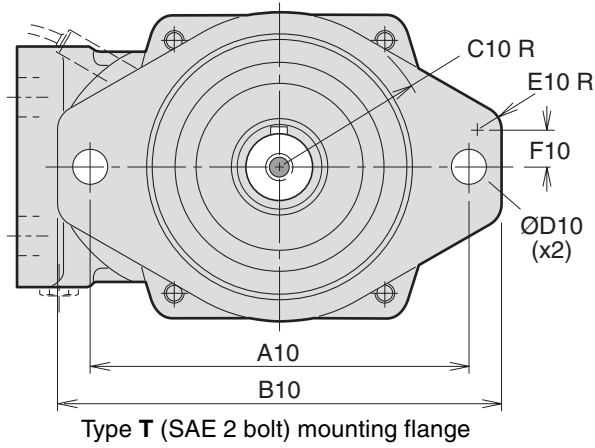

Shown: F12-60 with 2 bolt flange

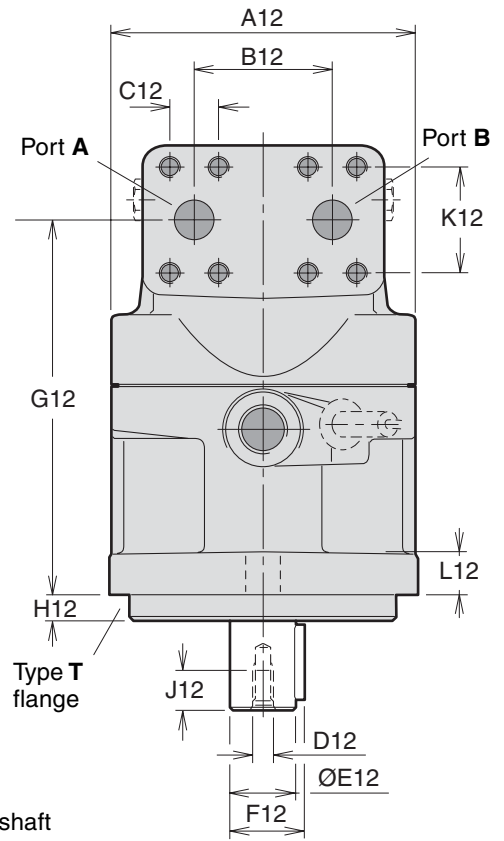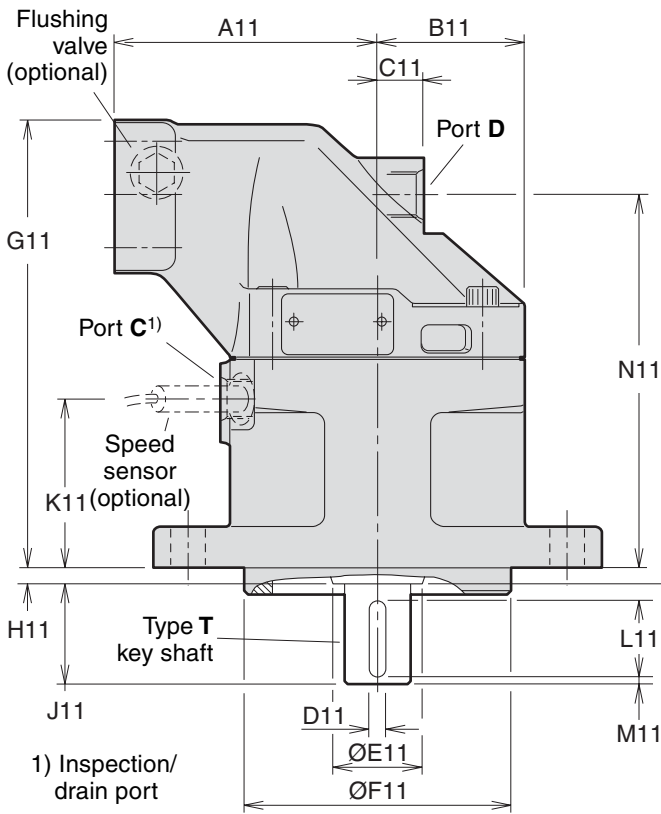

| Dim. | F12-30 | F12-40 | F12-60 |
|-------------------|-------------------|-------------------|-------------------|
| A10 | 146 | 181 | 181 |
| B10 | 176 | 215 | 215 |
| C10 | 63 | 74 | 74 |
| D10 | 14.4 | 17.5 | 17.5 |
| E10 | 10 | 16 | 16 |
| F10 | 10 | 15.5 | 15.5 |
| A11 | 100 | 110 | 125 |
| B11 | 59 | 65 | 70 |
| C11 | 25 | 26 | 22 |
| D11 | 6.35 | 7.94 | 7.94 |
| E11 | 33 | 42 | 42 |
| F11 | 101.60/ 101.55 | 127.00/ 126.95 | 127.00/ 126.95 |
| G11 | 189.5 | 197 | 214 |
| H11 | 8 | 8 | 8 |
| J11 | 38 | 48 | 48 |
| K11 | 71 | 77 | 81.5 |
| L11 | 31.8 | 38.1 | 38.1 |
| M11 | 2.5 | 4 | 4 |
| N11 | 154 | 161 | 178.5 |
| Q11 | 26 | 27 | 27 |
| R11 | 33 | 48 | 48 |
| A12 | 122 | 134 | 144 |
| B12 | 66 | 66 | 66 |
| C12 | 23.8 | 23.8 | 23.8 |
| D12 ¹⁾ | 5/16"-24 | 3/8"-24 | 3/8"-24 |
| E12 | 25.40/ 25.35 | 31.75/ 31.70 | 31.75/ 31.70 |
| F12 | 28.2 | 35.2 | 35.2 |
| G12 | 154 | 161 | 178.5 |
| H12 | 9.7 | 12.7 | 12.7 |
| J12 | 16 | 19 | 19 |
| K12 | 50.8 | 50.8 | 50.8 |
| L12 | 18 | 20 | 20 |

| Ports | F12-30 | F12-40 | F12-60 |
|----------------------------|----------------|----------------|----------------|
| A, B size | 19 (3/4") | 19 (3/4") | 19 (3/4") |
| Screw thread ²⁾ | 3/8"-16 x22 | 3/8"-16 x20 | 3/8"-16 x22 |
| C thread | 3/4"-16 | 3/4"-16 | 7/8"-14 |
| D thread | 3/4"-16 | 3/4"-16 | 7/8"-14 |

A, B (main ports): SAE J518c (6000 psi)


C, D (drain ports): O-ring boss (SAE J514)

2) UN thread

Main ports A and B, type U (optional)

| | |
|--------|-----------------|
| F12-30 | 1 1/16" - 12 UN |
| -40 | 1 5/16" - 12 UN |
| -60 | 1 5/16" - 12 UN |

O-ring ports according to SAE J514d

 = Max 350 bar operating pressure.

Mounting flange T (SAE J744)

| | |
|--------|-----------------|
| F12-30 | SAE 'B', 2 bolt |
| -40 | SAE 'C', 2 bolt |
| -60 | SAE 'C', 2 bolt |

Spline shaft S (SAE J498b, class 1, flat root, side fit)

| | |
|--------|---------------------------|
| F12-30 | SAE 'B' 13 T; 16/32 DP |
| -40 | SAE 'C' 14 T; 12/24 DP |
| -60 | SAE 'C' 14 T; 12/24 DP |


1) UNF-2B thread

Key shaft T (SAE J744)


| | |
|--------|-----------------------------|
| F12-30 | SAE 'B-B' Ø25.4 mm/1" |
| -40 | SAE 'C' Ø31.75 mm/1 1/4" |
| -60 | SAE 'C' Ø31.75 mm/1 1/4" |

F11-150

(CETOP version)

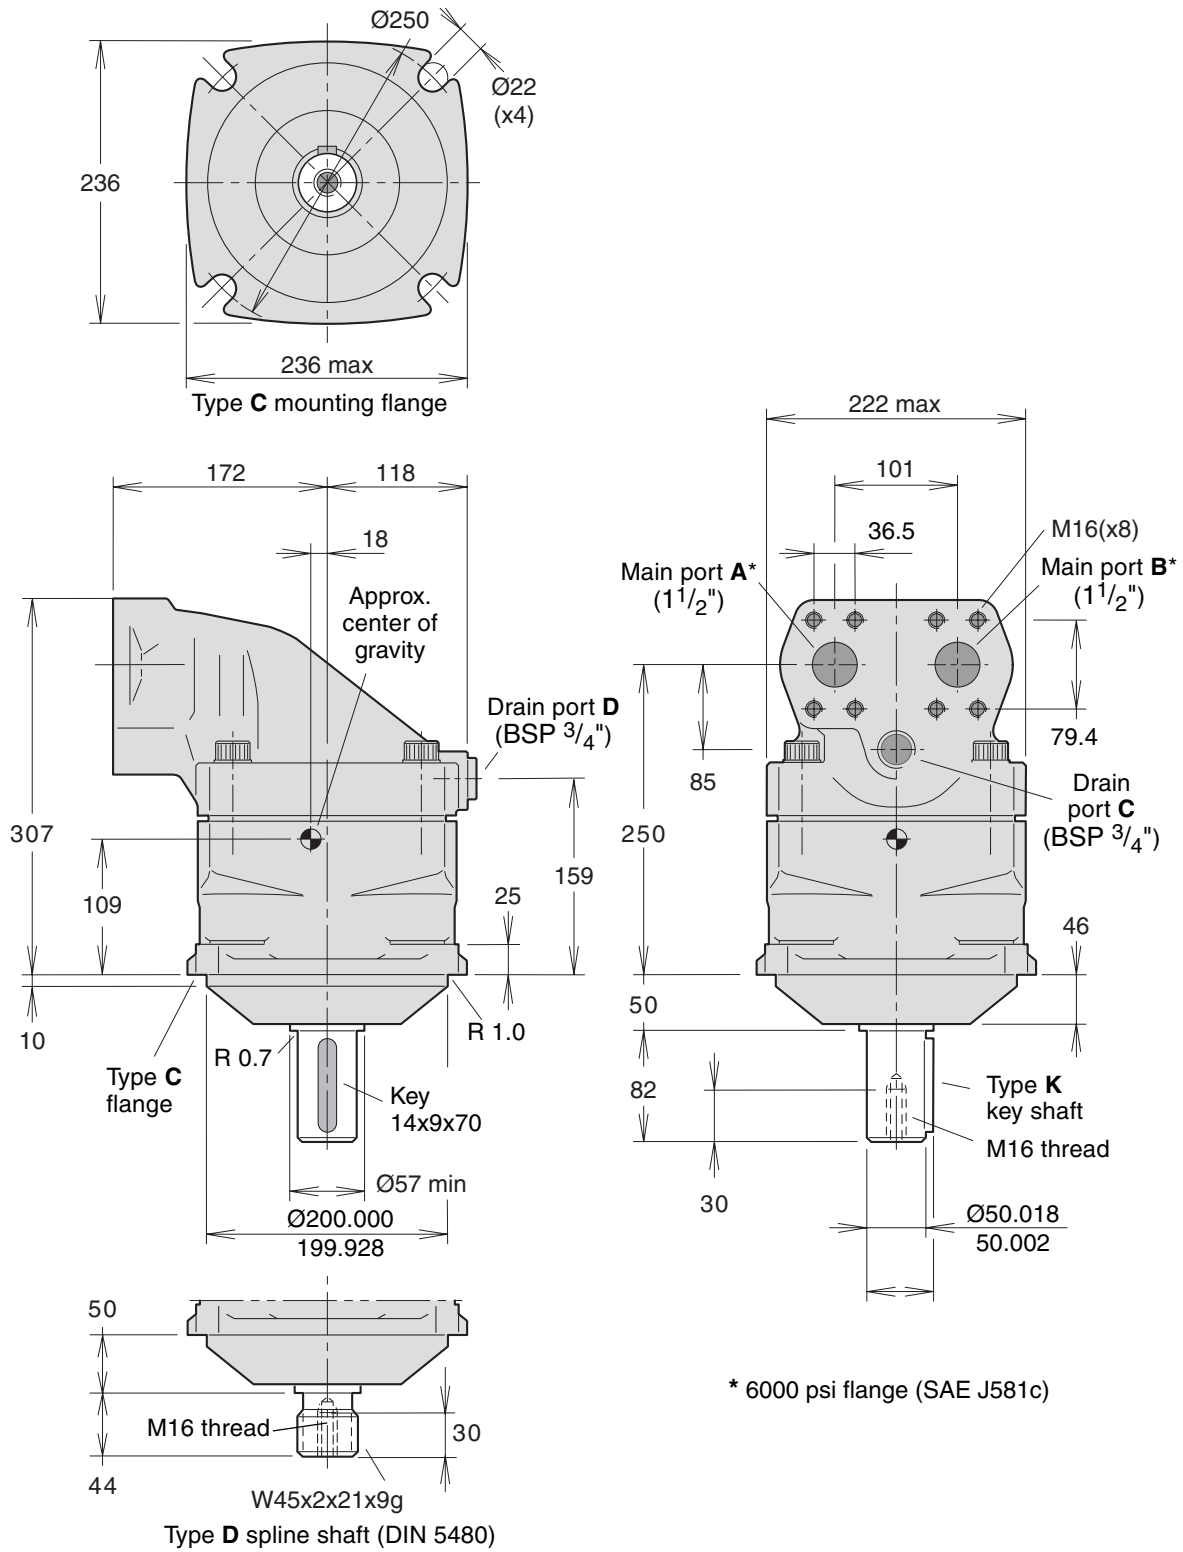

F11-250
 (SAE version)

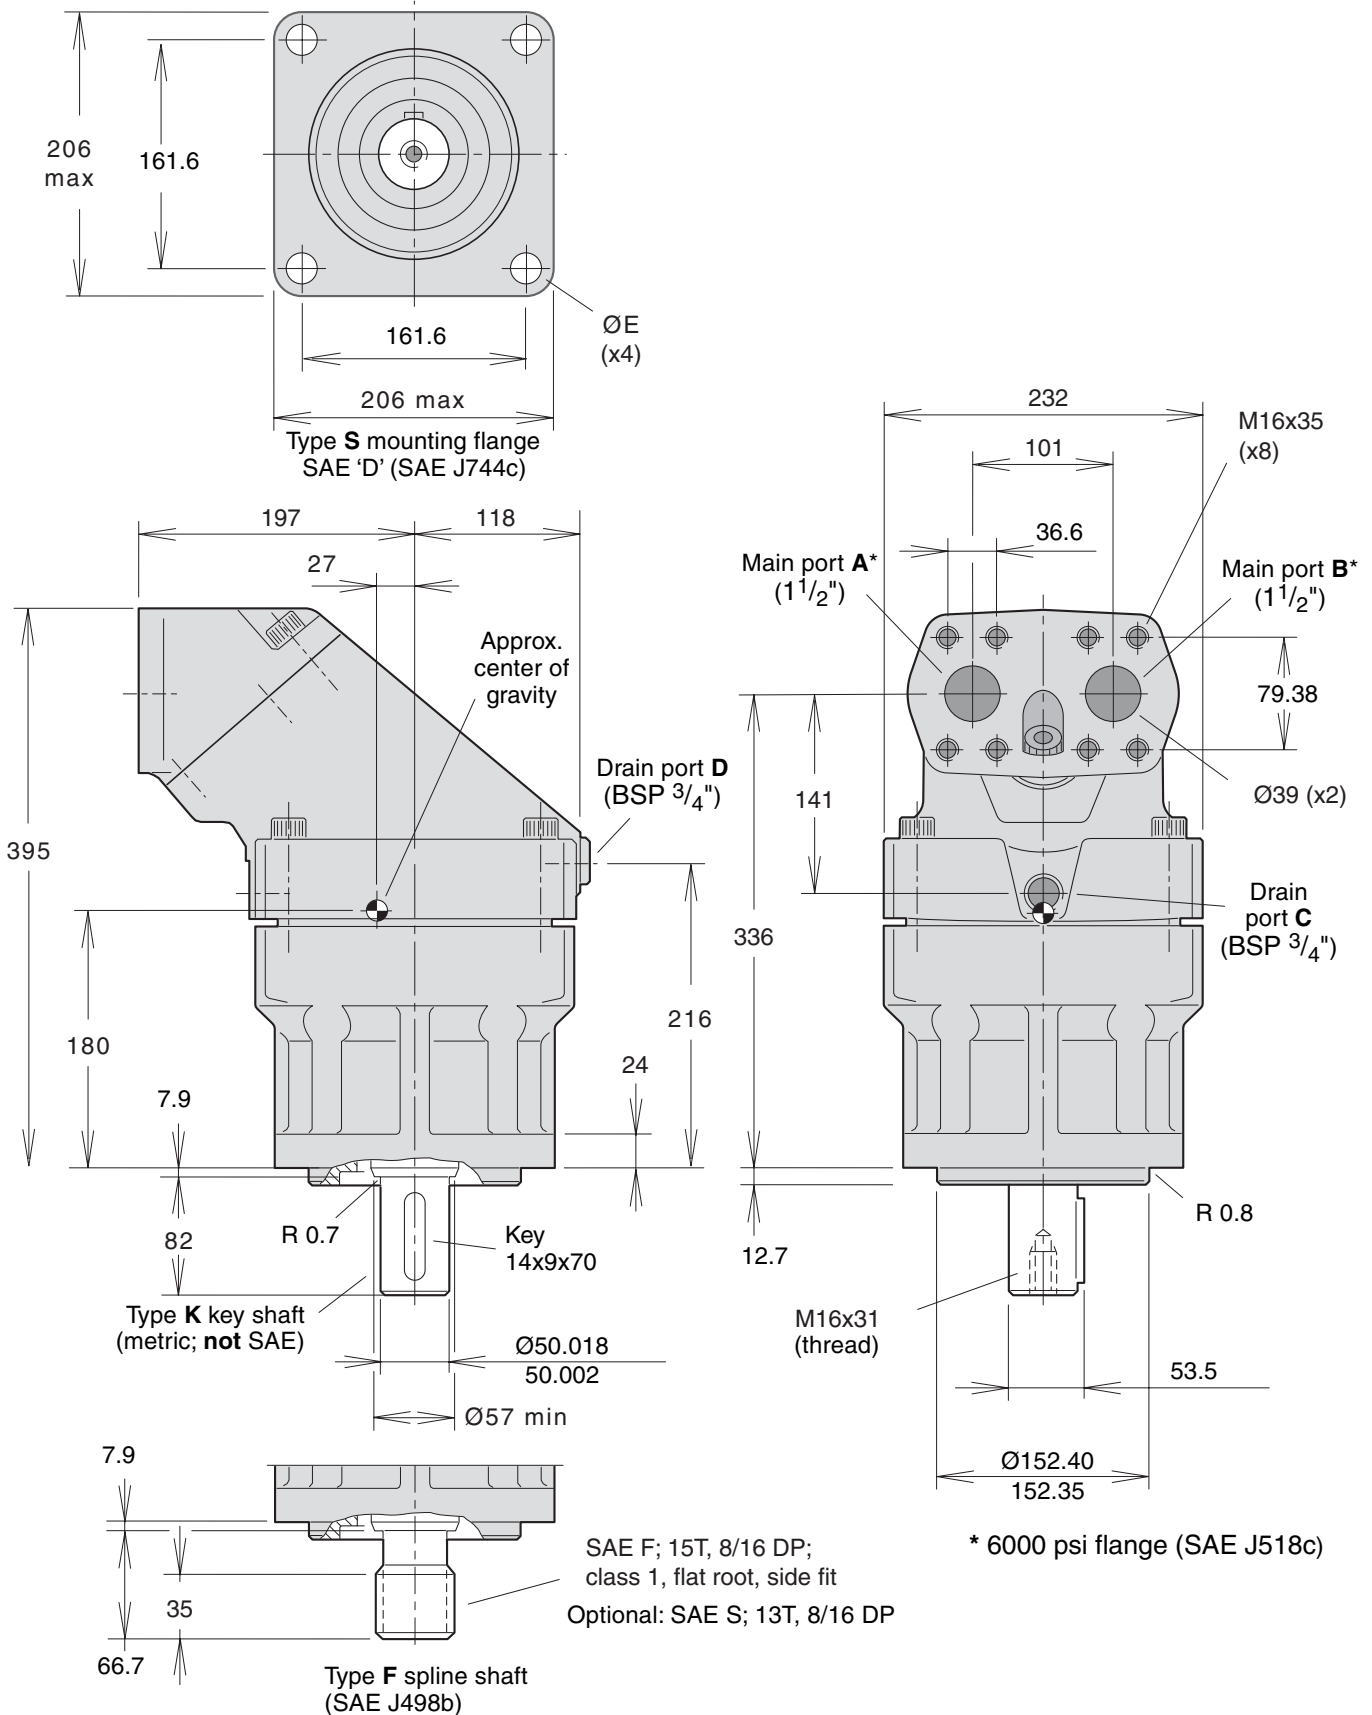


F11 saw motors

Series F11 motors have proven extremely reliable in demanding applications such as bar (chain) saws. Primarily due to the 40° bent-axis design, spherical pistons (with laminated piston rings) and gear synchronization, very high speeds are permissible. Not even low temperatures at start-up affect reliability.

To further enhance the saw function and, at the same time, reduce weight, cost and installation dimensions, a specific saw motor has been developed (frame sizes -10, -14 and -19; refer to the illustration to the right) which is specifically dedicated to bar saws. The motor allows the saw bar bearings to be mounted directly on the motor housing, and the spur gear installs on the motor shaft without any additional bearings.

For more detailed information (available versions, ordering codes, installation dimensions, etc.), refer to 'F11 Saw Motors' (catalogue 9129 8245-02).

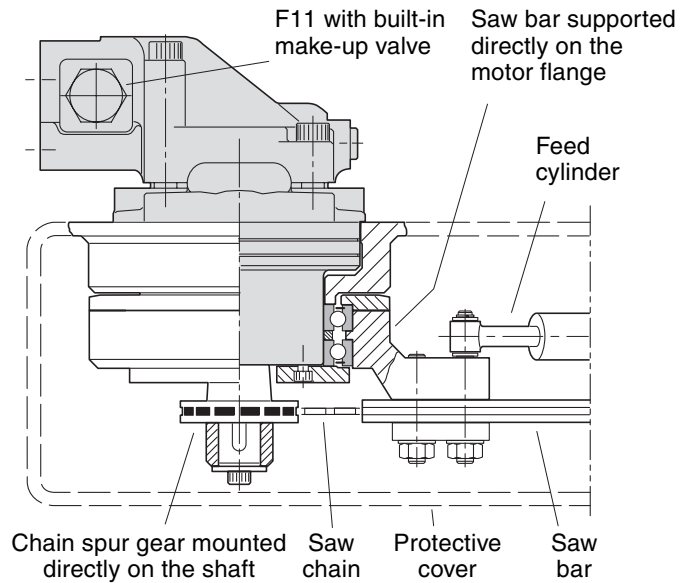


Chain saw installation (example; F11-10 shown)


F11 fan motors

Frame sizes -10, -14 and -19 are also available as 'fan motors' with a built-in check valve (refer to the schematic below) and CETOP mounting flange. Just like the saw motor, the fan motor can be operated at very high speeds without reliability problems. The fan is usually installed directly on the motor shaft without additional bearing support.

Additional information (available versions, ordering codes, installation dimensions, etc.) is available in publication 'F11 Fan Motors' (catalogue 9129 8247-02).

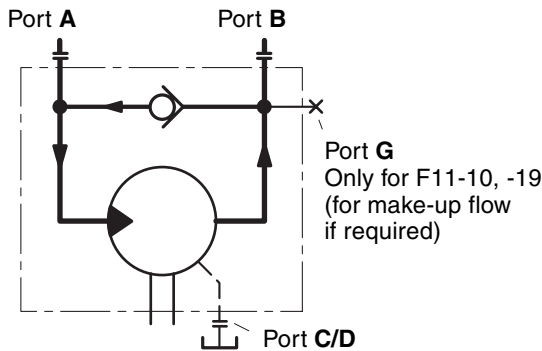

Fan motor schematic (left hand rotation shown).

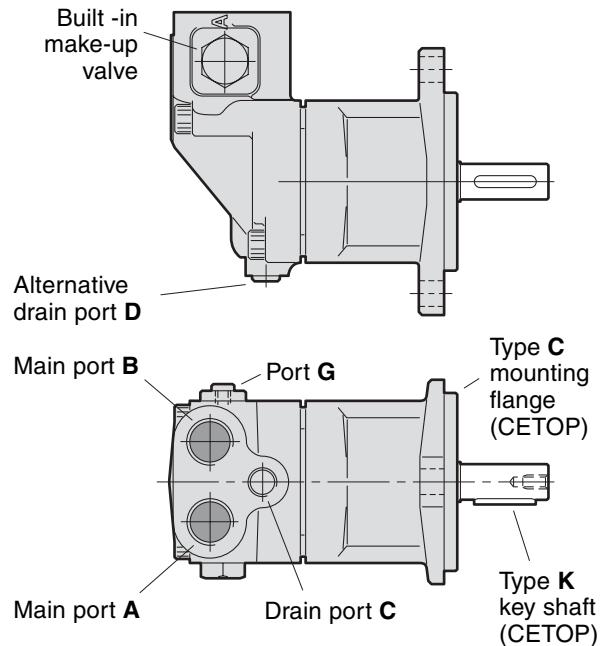

Fan motor (F11-10 shown).

F12 integrated flushing valve


(F12-30, -40, -60 and -80)

Series F12 (except F12-110; refer to the FV13 flushing valve block below) is available with an integrated flushing valve which provides the rotating parts with an additional cooling flow, required when operating at high speeds and power levels.


In a hydrostatic transmission, the valve also ensures that part of the main circuit fluid is being removed and replaced by cool, filtered fluid from the charge pump.

The flow is limited by a suitably sized nozzle that installes below a plug in the motor port flange.

NOTE: Ordering code, available nozzles and other information is provided in publication 'Mobile motor/pump accessories' (catalogue HY17-8258/UK).

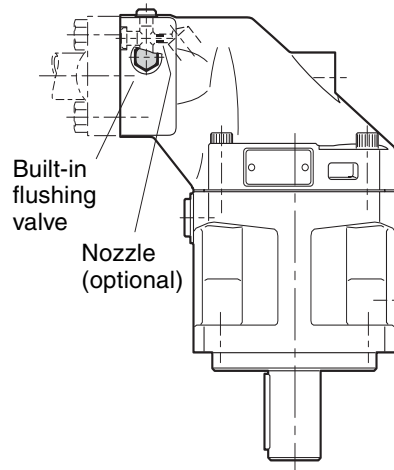

Integrated flushing valve (F12-30, -40, -60, -80) Nozzle (optional)

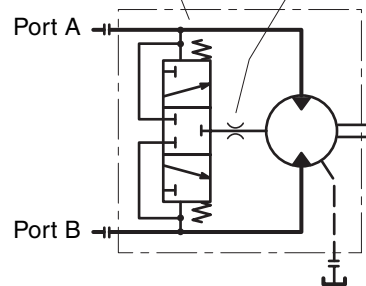

F12 accessory valve blocks

Type FV13 flushing valve (for F12-110)



A separate flushing valve block is available for the F12-110. It has the same function as the integrated valve for the other F12 frame sizes (above).

The valve block mounts between the motor port flange and the split flanges as shown to the right.

An optional nozzle can be installed in the valve block drain port.

Ordering code: FV13

NOTE: Additional information is available in publication 'Mobile motor/pump accessories' (catalogue HY17-8258/UK).

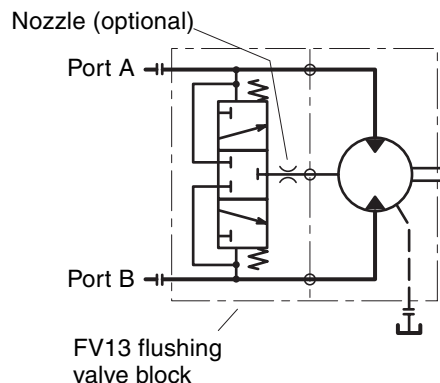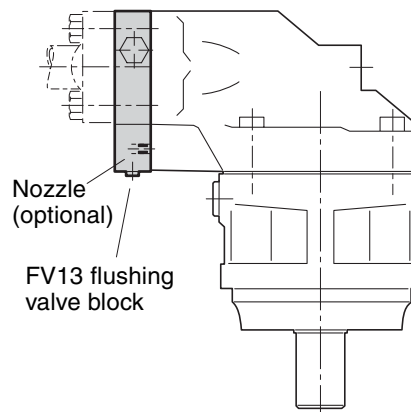

Type BT brake valve

When a motor (in an open loop system) is used in a hydrostatic vehicle transmission, the motor may operate faster than what corresponds to the available pump flow (e.g. in a steep downhill); this can lead to motor cavitation and loss of braking power.

The BT brake valve prevents cavitation by throttling the return flow from the motor as soon as the pressure level in the inlet port decreases to approximately 35 bar. At the same time, motor braking is provided when the pump flow decreases or is shut off.



The BT brake valve can be supplied with various optional functions such as a mechanical brake release valve and a flushing valve.

The valve block is very compact and installs between the motor port flange and the split flanges (refer to the illustration).

The BT valve block is available in two sizes:

- BT21 (3/4") for F12-30, -40, -60
- BT22 (1") for F12-80

NOTE: Detailed information on the BT valve is provided in publication 'Mobile motor/pump accessories' (catalogue HY17-8258/UK).

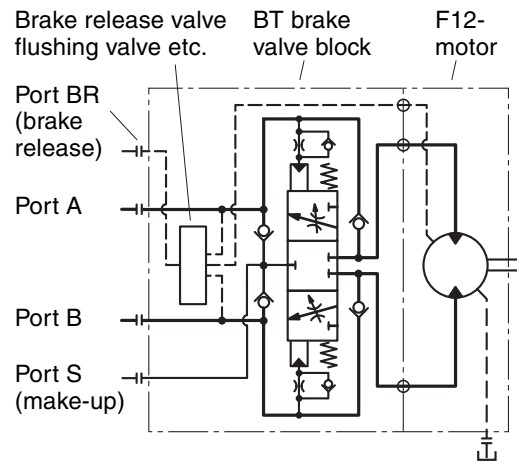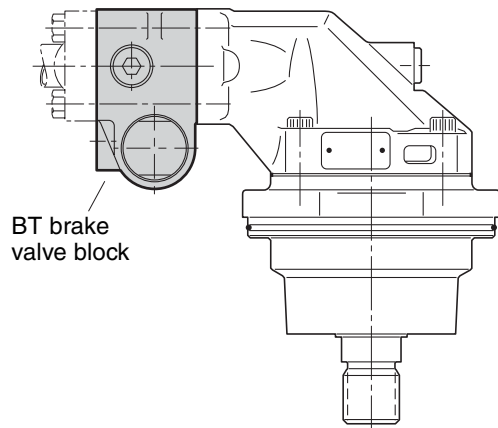

Type SR pressure relief/make-up valve



The SR pressure relief/make-up valve block for series F12 motors is designed to protect the motor from high pressure spikes as well as provide an excellent make-up function to help prevent motor cavitation (when port G is pressurized).

The valve block mounts between the motor port flange and the split flanges (as shown to the right).

The SR block is available in three sizes:

- SR11 (3/4") for F12-30, -40, -60
- SR12 (1") for F12-80
- SR13 (1 1/4") for F12-110

NOTE: - For additional information such as pressure settings and installation dimensions, refer to publication 'Mobile motor/pump accessories' (catalogue HY17-8258/UK).
 - To obtain a combined cross-over relief/make-up and flushing function on the F12-110, the SR13 and FV13 valve blocks can be stacked (with the flushing valve block mounted next to the motor).

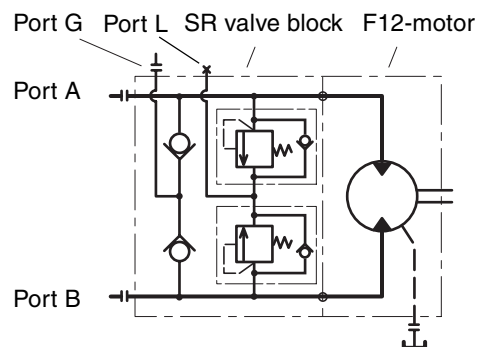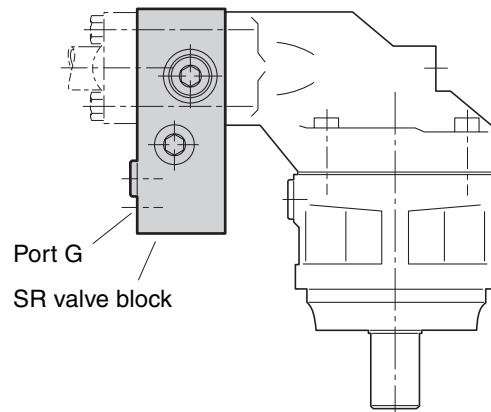

Type SV pressure relief valve

The SV pressure relief valve for series F12 motors protects the motor and the corresponding main hydraulic lines from pressure spikes. Like the SR valve block (page 31), it has integrated cartridge type pressure relief valves and mounts between the motor port flange and the split flanges as shown to the right.



The design of the relief valves permits a limited make-up flow (when port L is pressurized).

The SV valve block is available in three sizes:

- SV11 (3/4") for F12-30, -40, -60
- SV12 (1") for F12-80
- SV13 (1 1/4") for F12-110

NOTE: - Detailed information on available pressure settings, installation dimensions, etc. is provided in publication 'Mobile motor/pump accessories' (catalogue HY17-8258/UK).

- On the F12-110, the FV13 flushing valve block (page 36) can be mounted between the SV13 block and the motor port flange to obtain a combined pressure relief and flushing function.

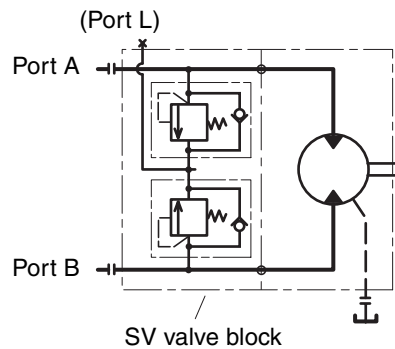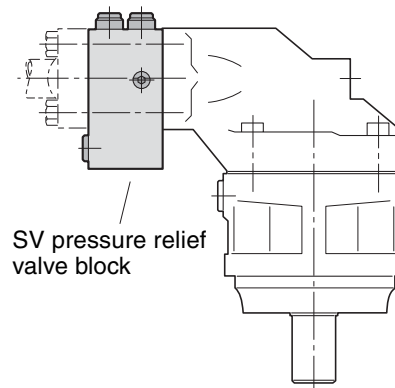


Speed sensor

A speed sensor kit is available for series F11/F12. A ferromagnetic differential (Hall-effect) sensor installs in a separate, threaded hole in the F11/F12 bearing housing.


On F12 the speed sensor is directed towards the ring gear. On F11 the speed sensor is directed towards the pistons. The speed sensor outputs a square wave signal within a frequency range of 5 Hz to 20 kHz.

NOTE: - The motor bearing housing must be prepared for the speed pick-up; refer to the F11/F12 ordering codes (pages 7-12).

- On F11 **the pistons position must be known before mounting.**
- Additional information is provided in 'Mobile motor/pump accessories' (catalogue HY17-8258/UK).
- The speed sensor is also shown in the illustrations on pages 19, 21, 22, 24, 26 and 28.

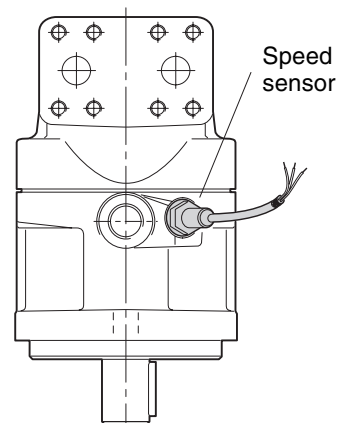

F12 with speed sensor.

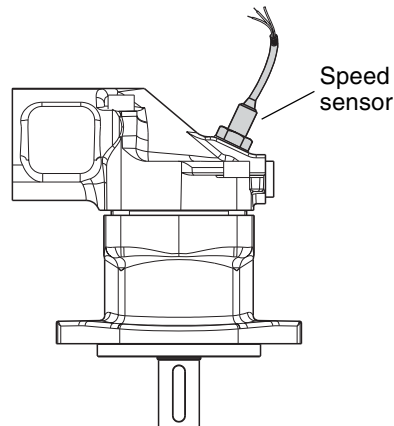


F11-14 with speed sensor.

F12 main port suction fittings

Suction fittings

To minimize the risk for cavitation when operating the F12 as a pump, we recommend using our suction fittings; all take 2" hoses.

| Part no. | SAE size | For | L [mm] |
|----------|----------|----------------------------|--------|
| 379 4070 | 3/4" | F12-30 F12-40 F12-60 | 100 |
| 370 4095 | 1" | F12-80 | 100 |
| 370 3916 | 1 1/4" | F12-110 | 102 |

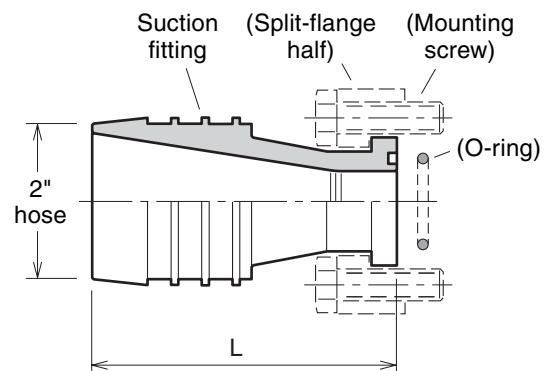

The suction fittings are designed for use with standard SAE or metric split-flange halves as shown. O-ring and mounting screw sizes are listed below.

| SAE size | O-ring dimension | Screw size | |
|----------|------------------|---------------|--------|
| | | SAE | Metric |
| 3/4" | 30.0x3.53 | 3/8"-16x1.50 | M10x35 |
| 1" | 32.9x3.53 | 7/16"-14x1.50 | M12x40 |
| 1 1/4" | 37.7x3.53 | 1/2"-13x1.75 | M14x45 |

Suction fitting kits


Suction fitting kits are available for the F12 ISO and Cartridge versions. A kit consists of a suction fitting (shown above), two split-flange halves, an O-ring and four mounting screws.

| Part no. | SAE size | For | Screw size |
|----------|----------|----------------|------------|
| 379 4421 | 3/4" | F12-30/-40/-60 | M10x35 |
| 370 4098 | 1" | F12-80 | M12x40 |
| 370 3926 | 1 1/4" | F12-110 | M14x45 |

Split-flange kits

Separate metric split-flange kits, consisting of two split-flange halves and four mounting screws for use on the F12 ISO and cartridge versions, are also available.

| Part no. | SAE size | For | Screw size |
|----------|----------|----------------|------------|
| 379 4405 | 3/4" | F12-30/-40/-60 | M10x35 |
| 370 4329 | 1" | F12-80 | M12x40 |
| 370 4330 | 1 1/4" | F12-110 | M14x45 |

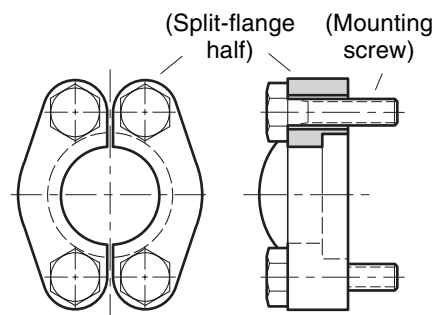


Direction of rotation

The M and H versions of series F11, and the M version of series F12, are bi-directional.

The L and R pump versions are uni-directional, allowing higher selfpriming speeds (refer to page 14).

The illustration to the right shows direction of flow versus shaft rotation. In a motor application, the shaft turns clockwise when port **B** (black arrow) is pressurized, and counter clockwise when port **A** (open arrow) is pressurized.

In a pump application where the shaft turns clock-wise, port B is the inlet port and should be connected to tank; when the shaft turns counter clockwise, port A is the inlet port.

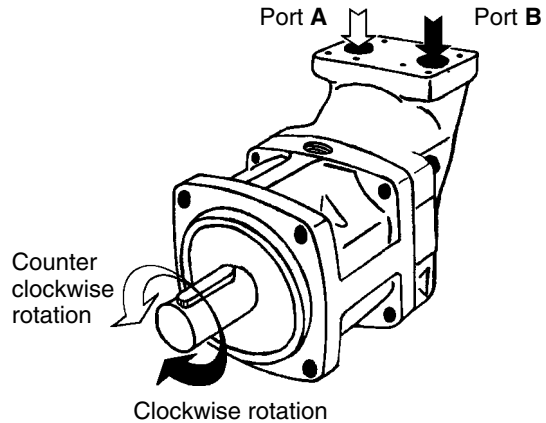

Hydraulic fluids

Ratings and performance data for series F11/F12 are based on operating with good quality, contamination-free, petroleum-based fluids.

Hydraulic fluids type HLP (DIN 51524), automatic transmission fluids type A, or API CD engine oils can be used.

Fire resistant fluids (when used under modified operating conditions) and synthetic fluids may also be suitable.

For additional information, refer to Hydraulic Marketing IS data base:

- Hydraulic fluid specifications
- Fire resistant fluids.

Operating temperature

The following temperatures should not be exceeded (type **H** and **N** shaft seals):

Drain fluid: 90 °C.

FPM shaft seals (type **E**, type **V**) can be used to 115 °C drain fluid temperature.

NOTE: The temperature should be measured at the utilized drain port.

Continuous operation may require case flushing in order to meet the viscosity and temperature limitations.

The following table shows operating speeds, above which flushing is usually required, as well as suggested flow through the case.

NOTE:

When operating the F11/F12 as a pump above the selfpriming speed (valid for both the pump and motor versions), the inlet must be sufficiently pressurized. Increased noise and deteriorating performance may otherwise be experienced.

For further information refer to 'Selfpriming speed and required inlet pressure' on page 6.

Series F11

| Frame size | Speed [rpm] | Flow [l/min] |
|------------|-------------|--------------|
| F11-5 | 5500 | 1-2 |
| F11-10 | 4500 | 2-3 |
| F11-14 | 4500 | 2-3 |
| F11-19 | 4000 | 2-4 |
| F11-150 | 2200 | 10-20 |
| F11-250 | 1800 | 12-22 |

Series F12

| Frame size | Speed [rpm] | Flow [l/min] |
|------------|-------------|--------------|
| F12-30 | 3500 | 4-8 |
| F12-40 | 3000 | 5-10 |
| F12-60 | 3000 | 7-14 |
| F12-80 | 2500 | 8-16 |
| F12-110 | 2300 | 9-18 |

Installation information

Viscosity

The ideal operating range is 15 to 30 mm²/s [cSt].
At operating temperature, the viscosity (of the drain fluid) should be kept above 8 mm²/s [cSt].
At start-up, the viscosity should not exceed 1000 mm²/s [cSt]

Filtration

To obtain the highest service life of the F11/F12, the fluid cleanliness should meet or exceed ISO code 18/13 (ISO 4406).
During normal operating conditions, a 10 µm (absolute) filter is recommended.

Case pressure

The tables below show the highest recommended case pressure as a function of shaft speed.
'Nominal' shaft seal life can be expected at a certain speed and the corresponding max case pressure. Seal life will be shorter, however, at unfavourable operating conditions (high temperature, low oil viscosity, contaminated oil).

Series F11

Max case pressure [bar] versus shaft speed [rpm]

| Speed Shaft seal | 1500 | | 3000 | | 4000 | | 5000 | | 6000 | | 8000 | | 9000 | | 10000 | | 11000 | | 12000 | |
|---------------------|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|-------|-----|-------|-----|-------|-----|
| | H/V | N/E | H/V | N/E | H/V | N/E | H/V | N/E | H/V | N/E | H/V | N/E | H/V | N/E | H/V | N/E | H/V | N/E | H/V | N/E |
| F11-5 | 20 | 2.2 | 13 | 1.9 | 10 | 1.6 | 8 | 1.3 | 6.5 | 0.9 | 5 | 0.6 | 4.2 | 0.5 | 4 | 0.3 | 3.5 | 0.2 | 3 | 0 |
| F11-10 | 20 | 2.2 | 11.5 | 1.8 | 8.5 | 1.2 | 7 | 1.0 | 5.5 | 0.7 | 4 | 0.5 | 3.8 | 0.4 | 3.5 | 0.2 | 3.0 | 0 | - | - |
| F11-14 | 19 | 2.2 | 9.5 | 1.5 | 7 | 1.0 | 5.5 | 0.8 | 4.5 | 0.5 | 3.5 | 0.4 | 3.0 | 0.2 | 2.5 | 0 | - | - | - | - |
| F11-19 | 19 | 2.2 | 9.5 | 1.4 | 7 | 0.9 | 5.5 | 0.6 | 4.5 | 0.4 | 3.5 | 0.3 | 3.0 | 0 | - | - | - | - | - | - |
| F11-150 | 9.5 | 2.2 | 4.5 | 0.6 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| F11-250 | 9.5 | - | 4.5 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |

Max recommended case pressure versus shaft speed - F11 seal types **H** or **V** and **N** or **E**.

Series F12

Max case pressure [bar] vs. shaft speed [rpm]


| Speed Shaft seal | 1500 | | 3000 | | 4000 | | 5000 | | 6000 | |
|---------------------|------|-----|------|-----|------|-----|------|-----|------|-----|
| | H/V | N | H/V | N | H/V | N | H/V | N | H/V | N |
| F12-30 | 14 | 2.2 | 7 | 1.4 | 5.5 | 0.9 | 4.5 | 0.6 | 3.5 | 0.2 |
| F12-40 | 12 | 2.2 | 6 | 1.2 | 4.5 | 0.7 | 3.5 | 0.4 | - | - |
| F12-60 | 12 | 2.2 | 6 | 1.2 | 4.5 | 0.7 | 3.5 | 0.4 | - | - |
| F12-80 | 10 | 2.2 | 5 | 0.8 | 4 | 0.4 | - | - | - | - |
| F12-110 | 9.5 | 2.2 | 4.5 | 0.6 | - | - | - | - | - | - |

Max recommended case pressure versus shaft speed - F12 seal types **H** or **V**, and **N**

Case drain connections


Series F11/F12 have two drain ports, **C** and **D**, while F12-110 has an additional port, **E**.

The uppermost drain port (such as port C in the illustration below) should always be utilized.

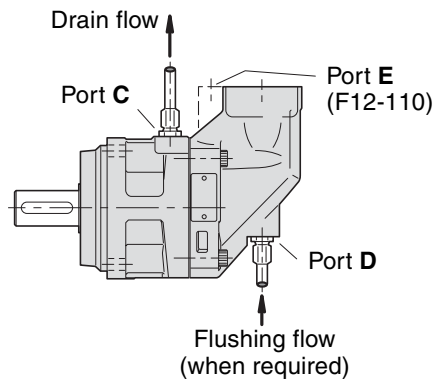

In mounting positions such as 'shaft up' (below) a spring loaded check valve should be installed in the drain line in order to insure a sufficiently high oil level in the case.

Preferably, the drain line should be connected directly to the reservoir.

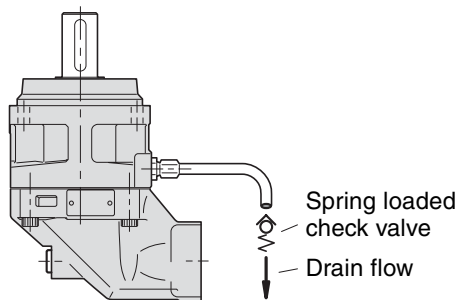**Before start-up**

Make sure the F11/F12 case as well as the entire hydraulic system is filled with a recommended fluid.

The internal leakage, especially at low operating pressures, is *not* sufficient to provide lubrication at start-up.

NOTE:

- To avoid cavitation and obtain a low noise level as well as reduced heat generation, tubes, hoses and fittings must be adequately dimensioned.
- Preferably, the suction line flow speed should be 0.5 to 1 m/s, and pressure line flow speeds 3 to 5 m/s.
- For series F12, suitable suction fittings are available (refer to page 39).



WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application, including consequences of any failure, and review the information concerning the product or system in the current product catalogue. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

Please contact your Parker representation for a detailed "Offer of Sale".

Hydraulics Group Sales Offices

Europe

Austria
Wiener Neustadt
Tel: +43 (0)2622 23501
Fax: +43 (0)2622 66212

Belgium
Nivelles
Tel: +32 (0)67 280 900
Fax: +32 (0)67 280 999

Czech Republic
Prague
Tel: +420 2 830 85 221
Fax: +420 2 830 85 360

Denmark
Ballerup
Tel: +45 4356 0400
Fax: +45 4373 8431

Finland
Vantaa
Tel: +358 (0)9 4767 31
Fax: +358 (0)9 4767 3200

France
Contamine-sur-Arve
Tel: +33 (0)450 25 80 25
Fax: +33 (0)450 03 67 37

Germany
Kaarst
Tel: +49 (0)2131 4016 0
Fax: +49 (0)2131 4016 9199

Hungary
Budapest
Tel: +36 (06)1 220 4155
Fax: +36 (06)1 422 1525

Ireland
Dublin
Tel: +353 (0)1 293 9999
Fax: +353 (0)1 293 9900

Italy
Corsico (MI)
Tel: +39 02 45 19 21
Fax: +39 02 4 47 93 40

The Netherlands
Oldenzaal
Tel: +31 (0)541 585000
Fax: +31 (0)541 585459

Norway
Ski
Tel: +47 64 91 10 00
Fax: +47 64 91 10 90

Poland
Warsaw
Tel: +48 (0)22 863 49 42
Fax: +48 (0)22 863 49 44

Portugal
Leca da Palmeira
Tel: +351 22 9997 360
Fax: +351 22 9961 527

Slovakia
Ref. Czech Republic

Spain
Madrid
Tel: +34 91 675 73 00
Fax: +34 91 675 77 11

Sweden
Spånga
Tel: +46 (0)8 597 950 00
Fax: +46 (0)8 597 951 10

United Kingdom
Warwick
Tel: +44 (0)1926 317 878
Fax: +44 (0)1926 317 855

International

Australia
Castle Hill
Tel: +61 (0)2-9634 7777
Fax: +61 (0)2-9899 6184

Canada
Milton, Ontario
Tel: +1 905-693-3000
Fax: +1 905-876-0788

China
Beijing
Tel: +86 10 6561 0520
Fax: +86 10 6561 0526

Asia Pacific Group
Hong Kong, Kowloon
Tel: +852 2428 8008
Fax: +852 2425 6896

India
Mumbai
Tel: +91 22 7907081
Fax: +91 22 7907080

Japan
Tokyo
Tel: +(81) 3 6408 3900
Fax: +(81) 3 5449 7201

Latin America Group
Brazil
Tel: +55 12 3954-5100
Fax: +55 12 3954-5266

South Africa
Kempton Park
Tel: +27 (0)11-961 0700
Fax: +27 (0)11-392 7213

USA
Cleveland (industrial)
Tel: +1 216-896-3000
Fax: +1 216-896-4031
Otsego (mobile)
Tel: +1 269-694-9411
Fax: +1 269-694-4638

Parker Hannifin is the world's premier supplier of motion and control systems and solutions, with sales and manufacturing facilities throughout the world. For product information and details of your nearest Parker sales office, visit us at www.parker.com/euro_mcd or call free on 00800 2727 5374.



Catalogue HY17-8249/UK
4M 03/04 RT

© Copyright 2004
Parker Hannifin Corporation
All rights reserved.